




SPORTDYN0 Y3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYN0 TEST SECORPIYO T066
 MAX POWER: 18.2 (18.2) / 7602
 MAX TORQUE: 18.05 (18.05) / 6553
 Temp. °C: 34.1
 Humidity %: 40
 Pressure: 1000.0 mbar
 KMH: 106.5
 Date/Time: 5/8/2018 11:29:22 AM

DATA FOR TEST: UMY DYN0 TEST SECORPIYO T066

Comments
 PERTAMAX TURBO/CDI STD

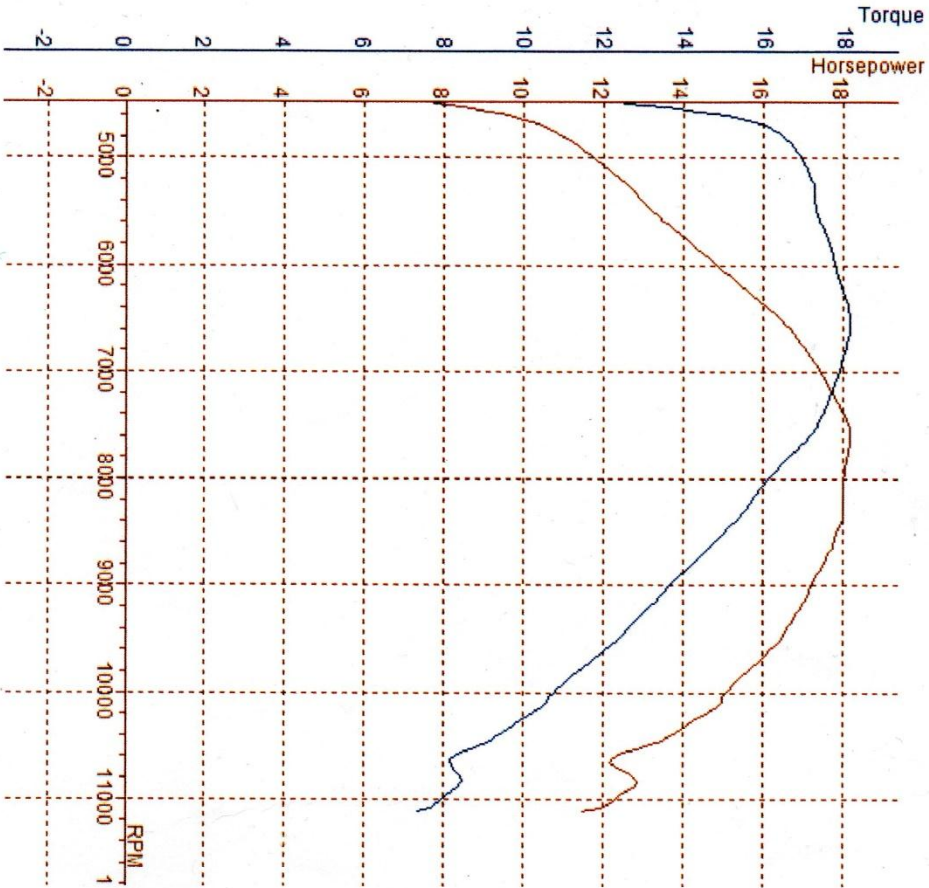

RPM	HP (KM/H)	(N*M/M)	T
4250	8.5	13.45	0.52
4500	9.1	14.28	0.54
4750	10.8	16.29	0.64
5000	11.8	16.87	0.76
5250	12.7	17.16	0.88
5500	13.3	17.24	1.00
5750	14.1	17.48	1.10
6000	14.9	17.68	1.22
6250	15.7	17.89	1.34
6500	16.4	18.04	1.44
6553	16.6	18.05	1.44
6750	17.0	17.94	1.56
7000	17.5	17.74	1.68
7250	17.8	17.47	1.80
7500	18.2	17.17	1.92
7602	18.2	17.02	1.96
7750	18.1	16.61	2.04
8000	18.0	15.94	2.18
8250	18.0	15.51	2.30
8500	17.8	14.80	2.46
8750	17.5	14.18	2.60
9000	17.2	13.49	2.76
9250	16.8	12.86	2.92
9500	16.4	12.18	3.10
9750	15.7	11.38	3.28
10000	15.1	10.67	3.46
10250	14.3	9.84	3.68
10500	13.0	8.76	3.92
10750	12.6	8.27	4.16
11000	12.3	7.86	4.44


LOSSES: 0.0 HP
 TOTAL ENGINE: 18.2HP
 0.0N*M/M
 18.05N*M/M



TEST NAME: UMY DYNNO TEST SECORPIYO T066 | MAX POWER: 18.2 (18.2) / 7602 | MAX TORQUE: 18.05 (18.05) / 6553 | Temp. °C: 34.1 | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.5 | Date/Time: 5/8/2018 11:29:22 AM

SPORTDYNNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included!

DATA FOR TEST: UMY DYNNO TEST SECORPIYO T066

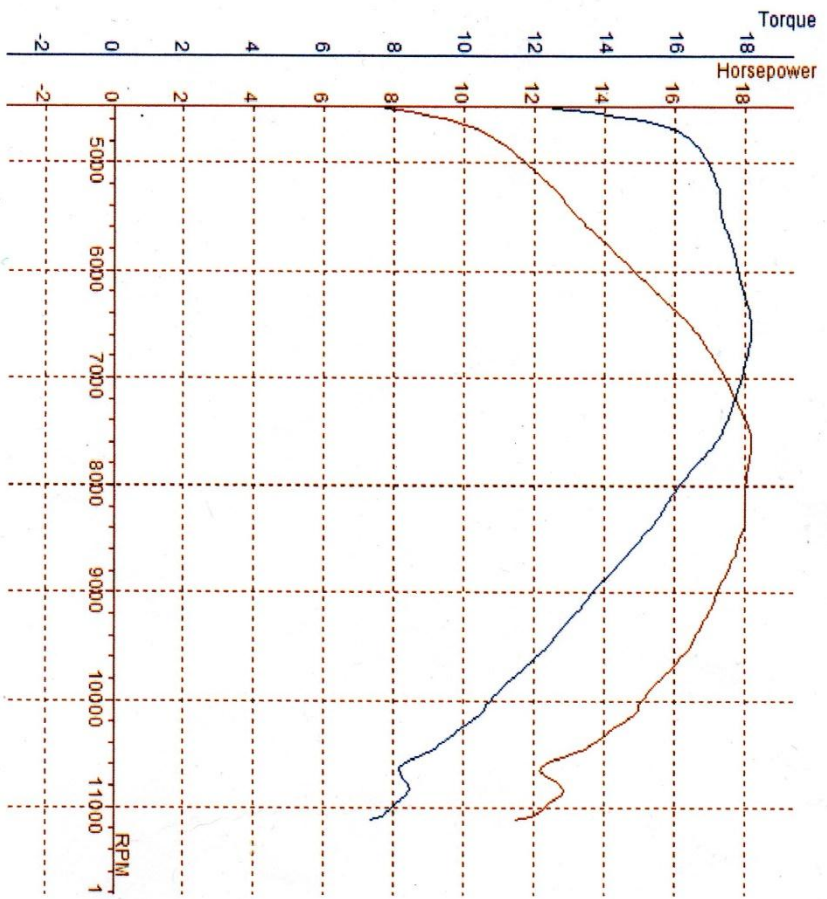

RPM	HP (HP)	(N*M*MM)	T
4250	8.5	13.45	0.52
4500	9.1	14.28	0.54
4750	10.8	16.29	0.64
5000	11.8	16.87	0.76
5250	12.7	17.16	0.88
5500	13.3	17.24	1.00
5750	14.1	17.48	1.10
6000	14.9	17.68	1.22
6250	15.7	17.89	1.34
6500	16.4	18.04	1.44
6553	16.6	18.05	1.46
6750	17.0	17.94	1.56
7000	17.5	17.74	1.68
7250	17.8	17.47	1.80
7500	18.2	17.17	1.92
7602	18.2	17.02	1.96
7750	18.1	16.61	2.04
8000	18.0	15.94	2.18
8250	18.0	15.51	2.30
8500	17.8	14.80	2.46
8750	17.5	14.18	2.60
9000	17.2	13.49	2.76
9250	16.8	12.86	2.92
9500	16.4	12.18	3.10
9750	15.7	11.38	3.28
10000	15.1	10.67	3.46
10250	14.3	9.84	3.68
10500	13.0	8.76	3.92
10750	12.6	8.27	4.16
11000	12.3	7.86	4.44


LOSSES: 0.0 HP
 TOTAL ENGINE: 18.2HP



TEST NAME: UMY DYNO TEST SECORPIYO T067 | MAX POWER: 18.3 (18.3) / 7923 | MAX TORQUE: 17.96 (17.96) / 6783 | Temp. °C: 34.1 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.4 | Date/Time: 5/8/2018 11:29:39 AM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

DATA FOR TEST: UMY DYNO TEST SECORPIYO T067

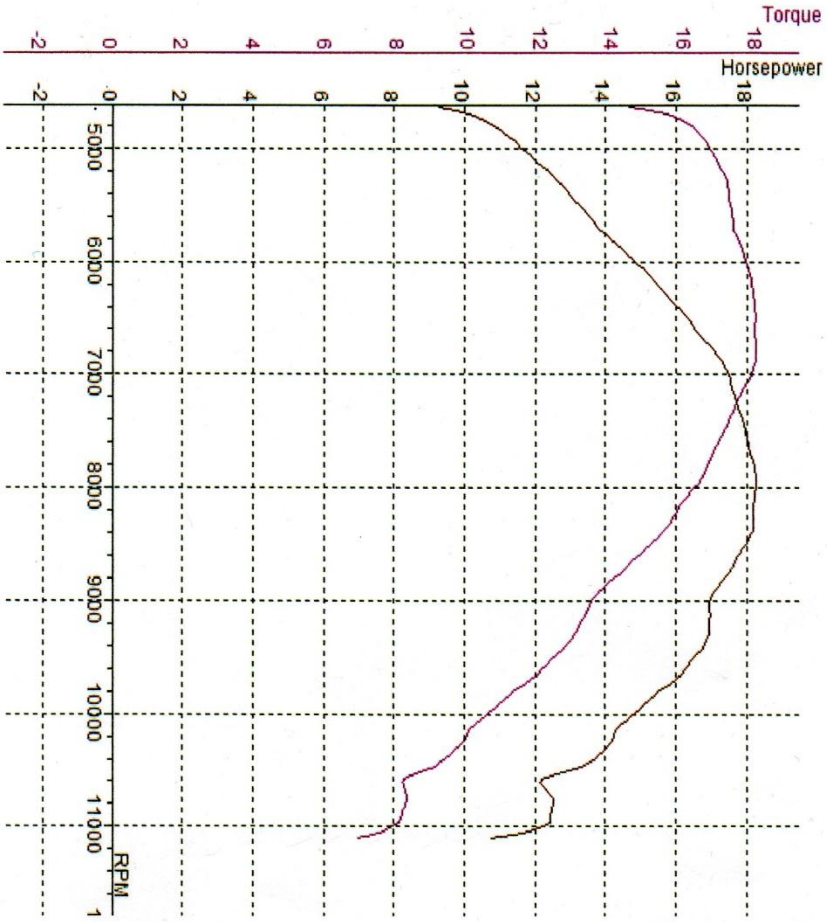

Comments
 PERFORMANX TURBO/CIDI STD

RPM	HP (HP)	(N*M*MD)	T
4250	9.7	15.00	0.52
4500	10.1	15.46	0.54
4750	10.7	16.06	0.58
5000	11.8	16.73	0.70
5250	12.7	17.14	0.82
5500	13.2	17.22	0.92
5750	14.0	17.38	1.04
6000	14.9	17.70	1.16
6250	15.6	17.85	1.26
6500	16.4	17.93	1.38
6750	17.1	17.96	1.50
6783	17.1	17.96	1.50
7000	17.5	17.76	1.62
7250	17.7	17.35	1.74
7500	18.0	17.00	1.86
7750	18.2	16.64	1.98
7923	18.3	16.41	2.06
8000	18.3	16.23	2.10
8250	18.2	15.63	2.24
8500	18.0	14.99	2.38
8750	17.4	14.11	2.54
9000	16.9	13.31	2.70
9250	16.9	12.93	2.86
9500	16.5	12.28	3.02
9750	15.7	11.42	3.20
10000	14.7	10.40	3.42
10250	14.1	9.76	3.62
10500	12.7	8.55	3.88
10750	12.5	8.23	4.12
11000	12.2	7.86	4.38


LOSSES: 0.0 HP | 0.0 N*M*MD
 TOTAL ENGINE: 18.3 HP | 17.96 N*M*MD



SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T068
 MAX POWER: 18.5 (18.5) / 8077
 MAX TORQUE: 18.12 (18.12) / 6756
 Temp. °C: 34.1
 Humidity %: 40
 Pressure: 1000.0 mbar
 KMH: 106.4
 Date/Time: 5/8/2018 11:29:54 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T068

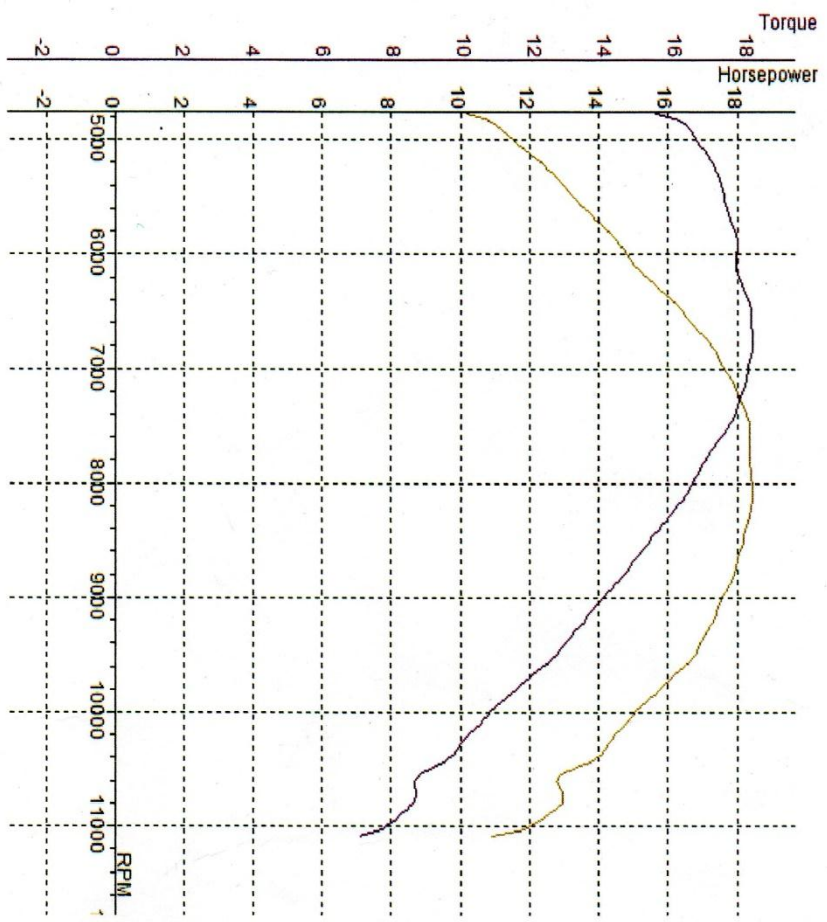

Comments
 PERFORMAX TURBO/CDI STD

RPM	HP (HP)	(N*M*M)	T
4250	10.5	15.75	0.52
4500	10.8	16.03	0.54
4750	11.0	16.23	0.56
5000	11.6	16.53	0.62
5250	12.5	17.04	0.74
5500	13.4	17.31	0.86
5750	14.2	17.58	0.98
6000	14.9	17.62	1.10
6250	15.6	17.81	1.20
6500	16.5	18.04	1.32
6750	17.2	18.12	1.42
7000	17.7	17.96	1.54
7250	18.1	17.74	1.66
7500	18.4	17.39	1.78
7750	18.4	16.82	1.90
8000	18.5	16.33	2.04
8250	18.5	16.26	2.06
8500	18.2	15.81	2.16
8750	18.0	15.16	2.30
9000	17.5	14.56	2.44
9250	17.2	13.80	2.60
9500	16.7	13.16	2.76
9750	15.8	12.43	2.94
10000	15.1	11.48	3.12
10250	14.3	10.65	3.30
10500	13.1	9.86	3.52
10750	13.0	8.83	3.76
11000	12.0	7.70	4.26

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.5 HP
 0.0 N*M*M
 18.12 N*M*M




Sport Devices
www.sportdevices.com

TEST NAME: UMY DYNO TEST SECORPIYO T069 | MAX POWER: 18.4 (18.4) / 8256 | MAX TORQUE: 18.06 (18.06) / 6497 | Temp. °C: 34.1 | Humidity: %: 40 | Pressure: 1000.0 mbar | KMH: 106.4 | Date/Time: 5/8/2018 11:30:10 AM

SPORTDYNO V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

DATA FOR TEST: UMY DYNO TEST SECORPIYO T069

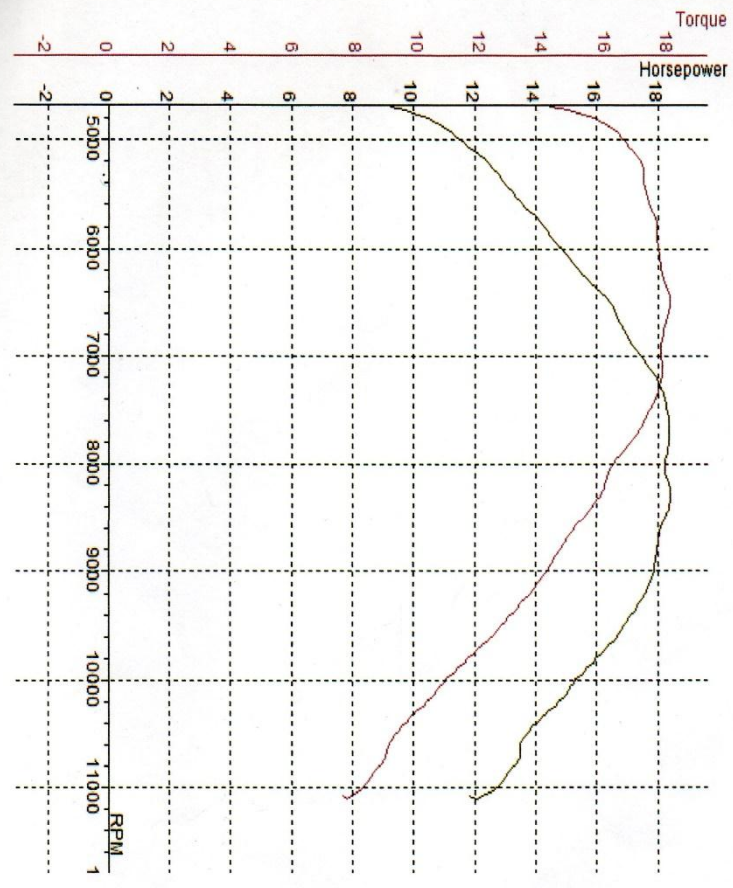

Comments:
PERTAMA TURBO/CDI STD

RPM	HP (HP)	(N*m)	T
4250	9.7	14.78	0.52
4500	10.1	15.24	0.54
4750	10.5	15.60	0.56
5000	11.6	16.61	0.66
5250	12.6	17.18	0.78
5500	13.4	17.32	0.90
5750	14.3	17.63	1.02
6000	14.9	17.67	1.12
6250	15.7	17.84	1.24
6497	16.4	18.06	1.34
6500	16.5	18.05	1.36
6750	16.9	17.84	1.46
7000	17.5	17.76	1.58
7250	18.1	17.71	1.70
7500	18.3	17.34	1.82
7750	18.4	16.84	1.94
8000	18.2	16.21	2.06
8250	18.4	15.85	2.20
8500	18.2	15.19	2.34
8750	18.0	14.59	2.48
9000	17.9	14.03	2.64
9250	17.5	13.41	2.78
9500	16.9	12.57	2.96
9750	16.1	11.69	3.14
10000	15.2	10.77	3.34
10250	14.5	10.05	3.54
10500	13.6	9.17	3.78
10750	13.4	8.82	4.00
11000	12.7	8.16	4.26

LOSSES: 0.0 HP
TOTAL ENGINE: 18.4 HP



Sport Devices
www.SportDevices.com


SPORTDYNO V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53

Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T075 | MAX POWER: 18.5 (18.5) / 7854 | MAX TORQUE: 18.38 (18.38) / 6815 | Temp. °C: 34.2 | Humidity %: 40 | Pressure: 1000.0 mbar | KM/H: 106.7 | Date/Time: 5/8/2018 11:46:43 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T075

Comments
PERTAMAX TURBO/CIDI STD

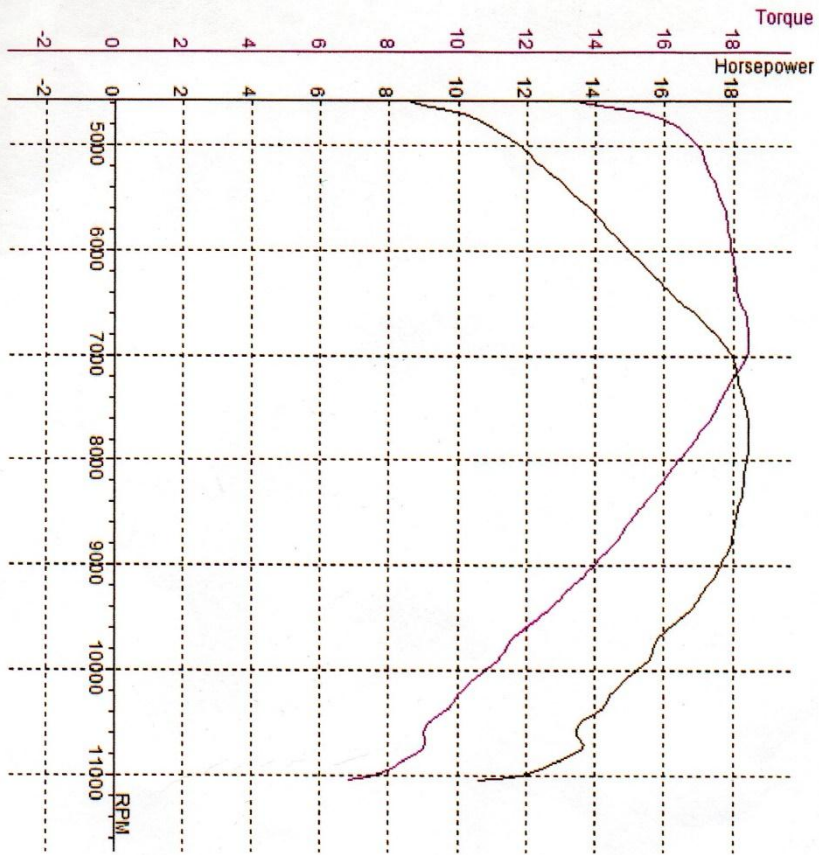


RPM	HP (HP)	(N*M*10)	T
4250	9.2	14.31	0.52
4500	9.7	14.95	0.54
4750	10.8	16.13	0.60
5000	11.9	16.98	0.72
5250	12.8	17.30	0.84
5500	13.5	17.56	0.94
5750	14.3	17.76	1.06
6000	15.1	17.89	1.18
6250	15.9	18.01	1.30
6500	16.6	18.16	1.40
6750	17.5	18.37	1.52
6815	17.6	18.38	1.54
7000	18.0	18.27	1.64
7250	18.2	17.79	1.76
7500	18.4	17.39	1.88
7750	18.4	16.89	2.00
7854	18.5	16.74	2.04
8000	18.4	16.26	2.14
8250	18.3	15.74	2.26
8500	18.1	15.12	2.40
8750	18.0	14.54	2.56
9000	17.6	13.90	2.70
9250	17.1	13.04	2.88
9500	16.5	12.28	3.04
9750	15.7	11.39	3.24
10000	15.1	10.65	3.44
10250	14.4	9.94	3.64
10500	13.5	9.08	3.88
10750	13.5	8.88	4.12
11000	11.8	7.60	4.42

LOSSES: 0.0 HP
TOTAL ENGINE: 18.5 HP



TEST NAME: UMY DYNNO TEST SECORPIYO T146
 MAX POWER: 18.5 (18.5) / 7903
 MAX TORQUE: 18.68 (18.68) / 6644
 Temp. °C: 35.2
 Humidity %: 40
 Pressure: 1000.0 mbar
 KMH: 106.8
 Date/Time: 5/8/2018 3:44:28 PM

SPORTDYNNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

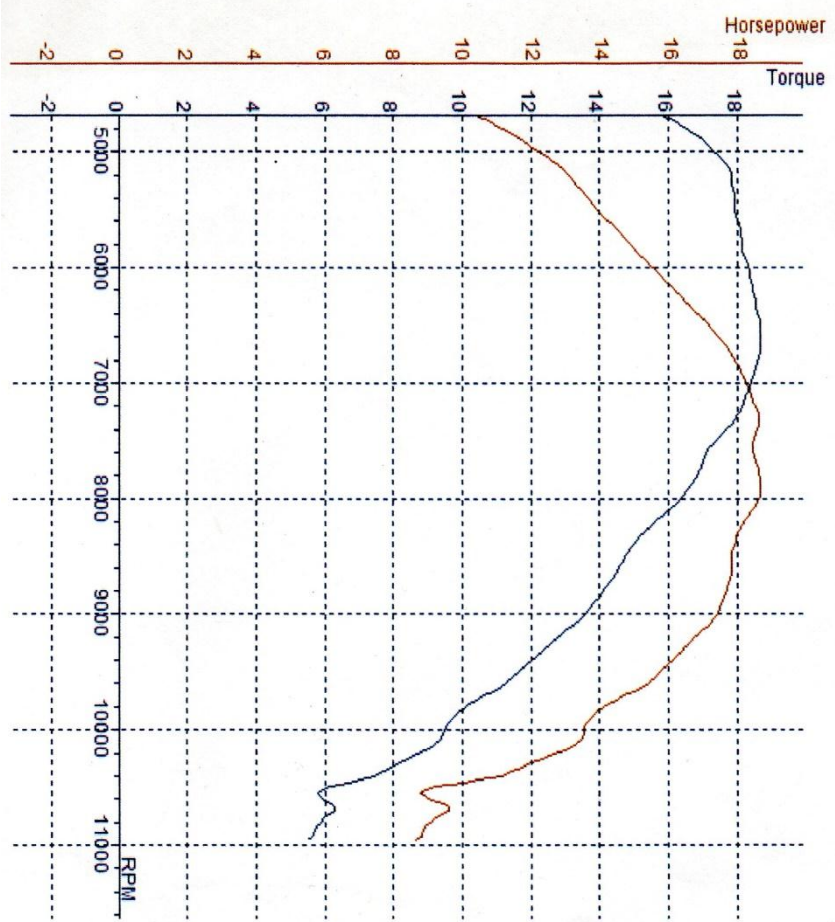

DATA FOR TEST: UMY DYNNO TEST SECORPIYO T146

Comments: PERTAMAX TURBO/REXTOR MAP D


RPM	HP (kW)	(N*M*M)	T
4250	10.7	16.18	0.52
4500	10.9	16.42	0.54
4750	11.2	16.63	0.56
5000	12.3	17.46	0.66
5250	13.2	17.85	0.78
5500	13.8	17.94	0.88
5750	14.6	18.13	1.00
6000	15.5	18.35	1.12
6250	16.3	18.52	1.24
6500	17.0	18.68	1.34
6644	17.4	18.68	1.40
6750	17.7	18.62	1.46
7000	18.1	18.36	1.58
7250	18.4	18.02	1.70
7500	18.3	17.30	1.82
7750	18.4	16.90	1.94
7903	18.5	16.63	2.02
8000	18.4	16.34	2.08
8250	17.9	15.39	2.22
8500	17.6	14.69	2.38
8750	17.5	14.21	2.52
9000	17.2	13.55	2.68
9250	16.4	12.53	2.86
9500	15.5	11.52	3.06
9750	14.2	10.31	3.26
10000	13.4	9.45	3.50
10250	12.0	8.28	3.76
10500	8.9	5.95	4.12
10750	9.2	6.06	4.18

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.5HP
 0.0N*M*M
 18.68N*M*M



TEST NAME: UMY DYN TEST SECORPIYO T1 45 | MAX POWER: 18.5 (18.5) / 7912 | MAX TORQUE: 18.54 (18.54) / 6744 | Temp. °C: 35.2 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 107.0 | Date/Time: 5/8/2018 3:44:10 PM

SPORTDYNNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

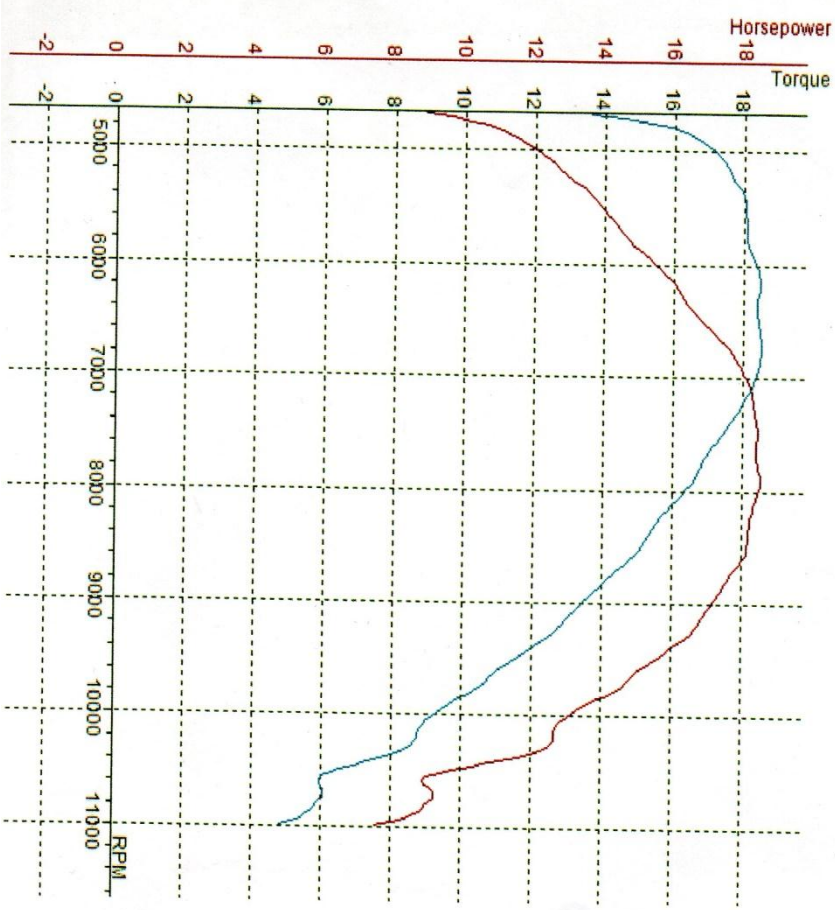

DATA FOR TEST: UMY DYN TEST SECORPIYO T1 45

Comments: PERKAMAX TURBO/REXTOR MAPD

RPM	HP (HP)(N*M*ND)	T
4500	9.6	1.455
4750	10.2	1.531
5000	12.0	1.717
5250	13.1	1.776
5500	13.9	1.805
5750	14.6	1.810
6000	15.4	1.838
6250	16.2	1.843
6500	16.9	1.844
6750	17.5	1.854
7000	17.6	1.852
7250	18.0	1.835
7500	18.3	1.785
7750	18.3	1.734
8000	18.3	1.681
8250	18.5	1.660
8500	18.4	1.628
8750	18.1	1.558
9000	18.1	1.506
9250	17.5	1.419
9500	17.0	1.341
9750	16.5	1.259
10000	15.5	1.152
10250	14.5	1.053
10500	12.9	9.14
10750	12.5	8.63
11000	9.4	6.32
11250	9.1	6.00

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.5HP
 0.0N*M*M
 18.54N*M*M




SR010120 V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53

Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included

TEST NAME: UMY DYNO TEST SECORPIYO T14 | MAX POWER: 18.3 (18.3) / 7924 | MAX TORQUE: 18.65 (18.65) / 6601 | Temp. °C: 35.2 | Humidity: %: 40 | Pressure: 1000.0 mbar | KMH: 107.0 | Date/Time: 5/8/2018 3:43:50 PM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T144

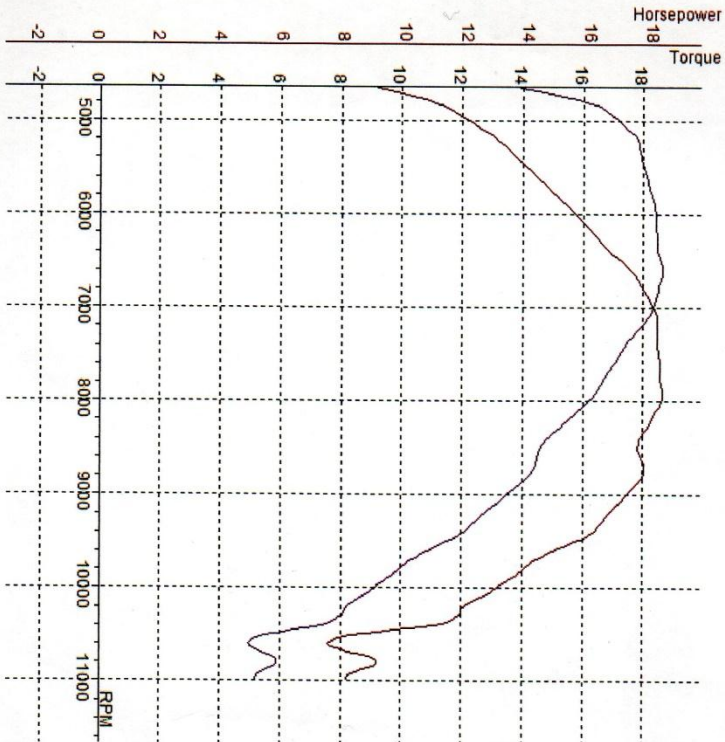

Comments:
 PERIF:MAX TURBOREXTOR MAPD


RPM	HP (HP@N*M*MM)	T (N*M*MM)
4250	9.6	14.72
4500	10.1	15.35
4750	10.6	15.84
5000	12.1	17.30
5250	13.2	17.87
5500	13.9	18.03
5750	14.7	18.24
6000	15.5	18.41
6250	16.2	18.45
6500	17.0	18.61
6601	17.3	18.65
6750	17.6	18.52
7000	18.0	18.28
7250	18.1	17.72
7500	18.1	17.20
7750	18.2	16.63
8000	18.2	16.40
8250	17.8	15.26
8500	17.5	14.57
8750	17.7	14.28
9000	17.0	13.39
9250	16.3	12.48
9500	15.3	11.34
9750	13.9	10.06
10000	12.8	9.07
10250	11.7	8.10
10500	8.1	5.47
10750	8.9	5.84

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.3HP



SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T143 | MAX POWER: 18.2 (18.2) / 7694 | MAX TORQUE: 18.51 (18.51) / 6505 | Temp. °C: 35.2 | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:43:33 PM

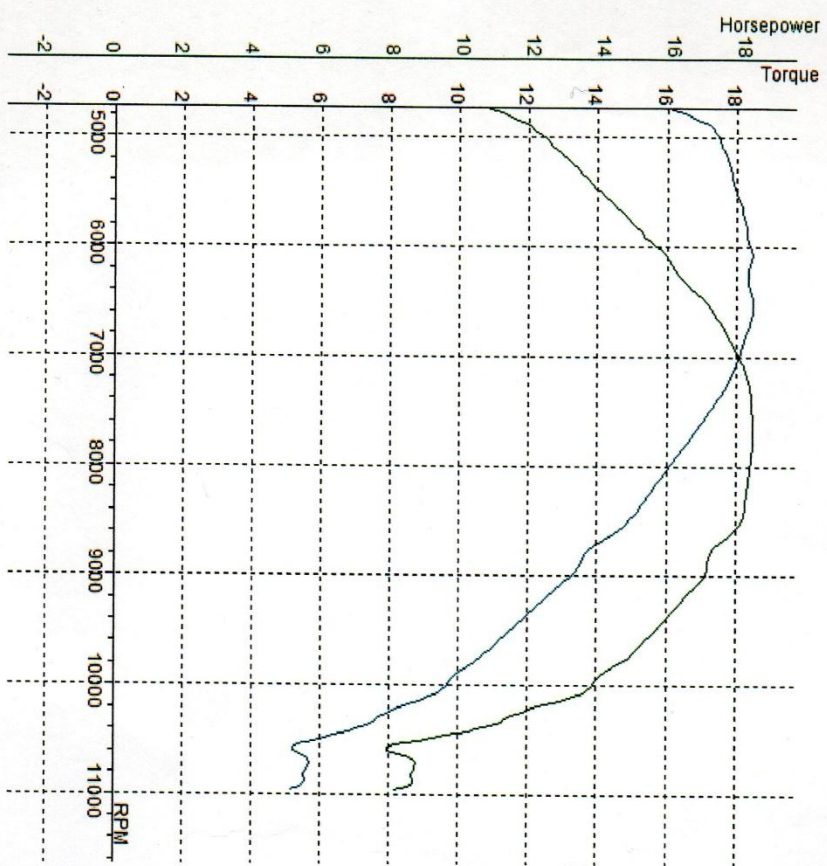

DATA FOR TEST: UMY DYNO TEST SECORPIYO T143

Comments
 PERFORMAX TURBO/REXTOR MAP D


RPM	HP (HP)	N*M	M
4250	11.0	16.35	0.52
4500	11.3	16.85	0.54
4750	11.6	17.09	0.56
5000	12.3	17.55	0.64
5250	13.2	17.84	0.76
5500	13.9	18.02	0.86
5750	14.7	18.28	0.98
6000	15.6	18.45	1.10
6250	16.1	18.36	1.20
6500	16.9	18.51	1.32
6750	17.4	18.34	1.44
7000	17.8	18.08	1.56
7250	18.1	17.72	1.68
7500	18.1	17.22	1.80
7750	18.2	16.82	1.90
8000	18.2	16.64	1.94
8250	18.1	16.02	2.08
8500	18.0	15.45	2.22
8750	17.8	14.86	2.36
9000	17.0	13.79	2.52
9250	16.8	13.23	2.68
9500	16.1	12.32	2.86
9750	15.4	11.43	3.06
10000	14.6	10.56	3.26
10250	13.6	9.64	3.48
10500	11.5	7.93	3.76
10750	8.6	5.85	4.16
10750	8.6	5.66	4.54

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.2 HP



TEST NAME: UMY DYNO TEST SECORPIYO T152 | MAX POWER: 18.8 (18.8) / 7015 | MAX TORQUE: 18.68 (18.68) / 6512 | Temp. °C: 33.1 | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:30:32 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

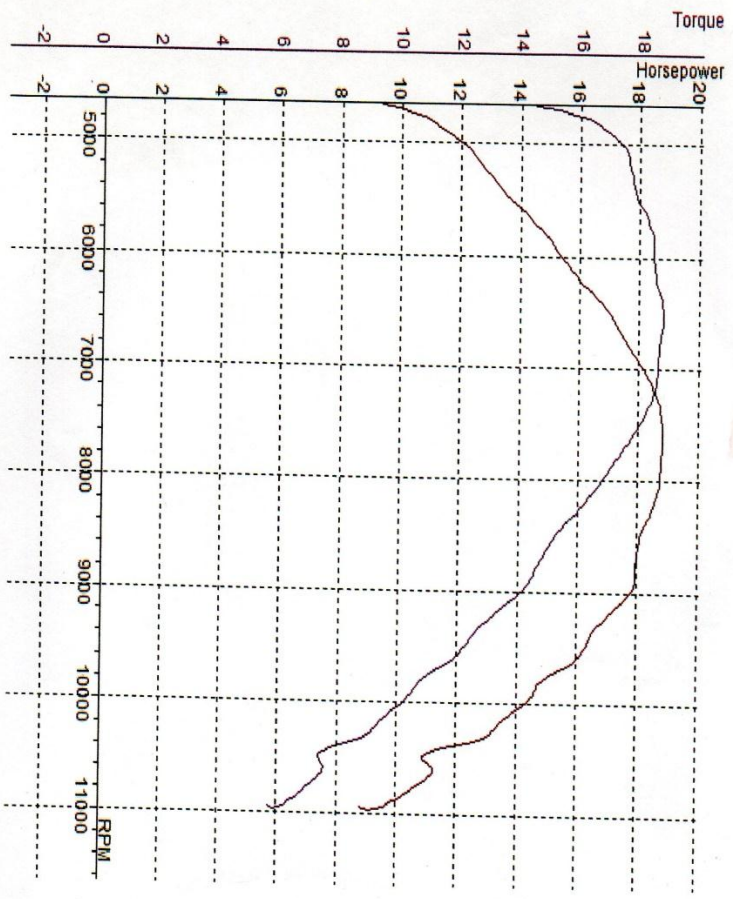

DATA FOR TEST: UMY DYNO TEST SECORPIYO T152

Comments: PERTAMAX TURBO/REXTOR MAP E


RPM	HP (HP)	HP/(N*M*MD)	T
4250	9.9	15.11	0.52
4500	10.4	15.69	0.54
4750	10.8	16.13	0.56
5000	12.2	17.34	0.68
5250	13.0	17.60	0.80
5500	13.7	17.81	0.90
5750	14.7	18.25	1.02
6000	15.5	18.32	1.14
6250	16.2	18.46	1.24
6500	17.0	18.68	1.36
6750	17.6	18.54	1.48
7000	18.3	18.49	1.60
7250	18.7	18.25	1.72
7500	18.8	17.86	1.82
7615	18.8	17.61	1.88
7750	18.8	17.21	1.96
8000	18.7	16.57	2.10
8250	18.4	15.81	2.24
8500	18.1	15.03	2.38
8750	18.0	14.54	2.52
9000	17.7	13.96	2.68
9250	16.9	12.92	2.84
9500	16.2	12.11	3.02
9750	14.9	10.78	3.24
10000	14.2	10.07	3.44
10250	13.2	9.08	3.68
10500	10.9	7.33	3.96
10750	10.7	7.03	4.26

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.8 HP



TEST NAME: UMY DYNNO TEST SECORPIYO T152 | MAX POWER: 18.8 (18.8) / 7615 | MAX TORQUE: 18.68 (18.68) / 6512 | Temp. °C: 35.1 | Humidity %: 40% | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:50:32 PM

SPORTDYNNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

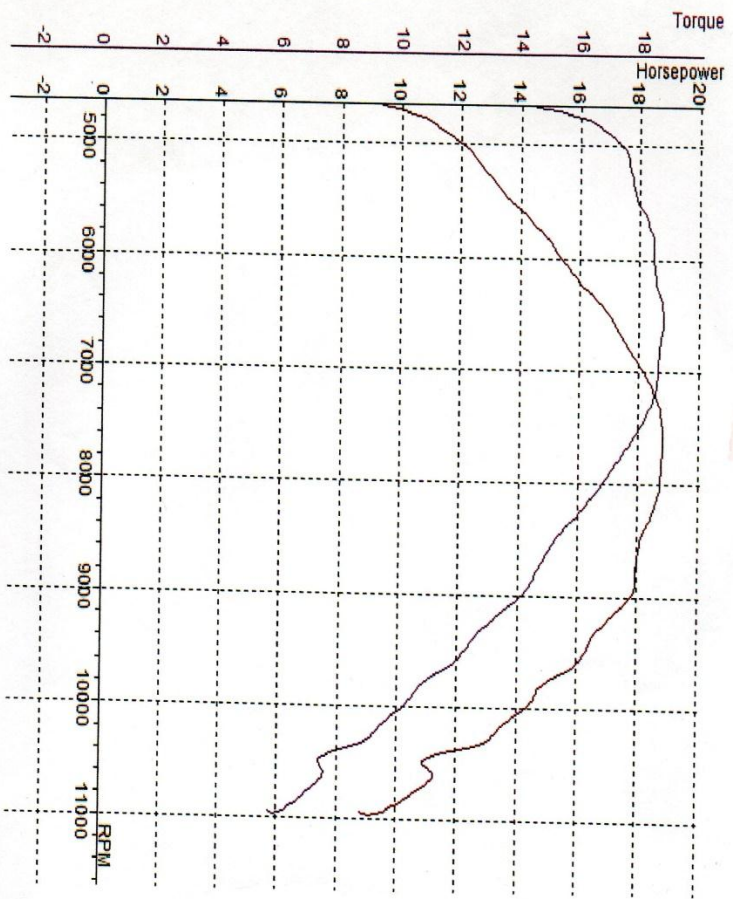

DATA FOR TEST: UMY DYNNO TEST SECORPIYO T152

Comments: PERFORMAX TURBO/REXTOR MAPE

RPM	HP (HP)	HP (N*M*M)	T
4250	9.9	15.11	0.52
4500	10.4	15.69	0.54
4750	10.8	16.13	0.56
5000	12.2	17.34	0.58
5250	13.0	17.60	0.80
5500	13.7	17.81	0.90
5750	14.7	18.25	1.02
6000	15.5	18.32	1.14
6250	16.2	18.46	1.24
6500	17.0	18.68	1.36
6750	17.6	18.54	1.48
7000	18.3	18.49	1.60
7250	18.7	18.25	1.72
7500	18.8	17.86	1.82
7615	18.8	17.61	1.88
7750	18.8	17.21	1.96
8000	18.7	16.57	2.10
8250	18.4	15.81	2.24
8500	18.1	15.03	2.38
8750	18.0	14.54	2.52
9000	17.7	13.96	2.68
9250	16.9	12.92	2.84
9500	16.2	12.11	3.02
9750	14.9	10.78	3.24
10000	14.2	10.07	3.44
10250	13.2	9.08	3.68
10500	10.9	7.33	3.96
10750	10.7	7.03	4.26


LOSSES: 0.0 HP | 0.0N*M*M
 TOTAL ENGINE: 18.8HP | 18.68N*M*M



TEST NAME: UMY DYNO TEST SECORPIVO TT151 | MAX POWER: 18.8 (18.8) / 7812 | MAX TORQUE: 18.64 (18.64) / 6428 | Temp. °C: 35.1 | Humidity %: 40 %

Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:50:14 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

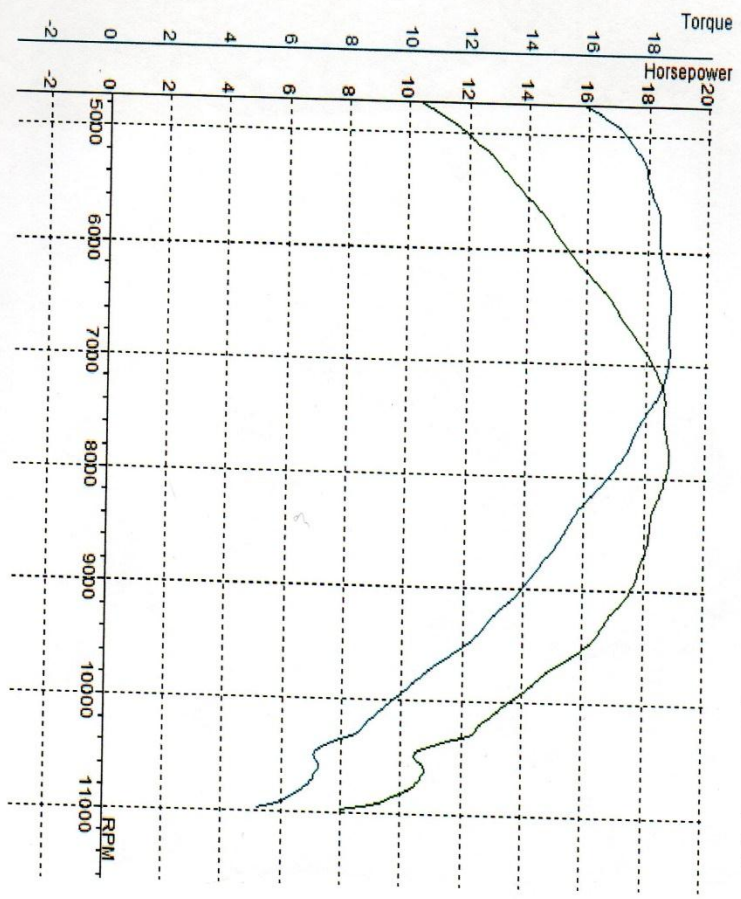

DATA FOR TEST: UMY DYNO TEST SECORPIVO TT151

Comments: PERFORMAX TURBO/REXTOR MAP E

RPM	HP (HP)	HP (N*M*MM)	T
4230	10.7	16.07	0.52
4500	11.0	16.34	0.54
4750	11.3	16.58	0.56
5000	12.1	17.23	0.64
5250	13.1	17.77	0.76
5500	13.9	17.98	0.86
5750	14.7	18.25	0.98
6000	15.4	18.28	1.10
6250	16.2	18.52	1.20
6428	16.8	18.64	1.28
6500	17.0	18.61	1.32
6750	17.7	18.61	1.44
7000	18.2	18.57	1.54
7250	18.6	18.29	1.66
7500	18.6	17.60	1.80
7750	18.8	17.21	1.92
7812	18.8	17.13	1.94
8000	18.6	16.49	2.06
8250	18.3	15.78	2.18
8500	18.2	15.17	2.32
8750	17.9	14.48	2.48
9000	17.5	13.79	2.64
9250	16.8	12.87	2.80
9500	16.0	11.90	3.00
9750	14.6	10.62	3.20
10000	13.5	9.51	3.44
10250	12.5	8.58	3.68
10500	10.4	7.05	3.98
10750	10.4	6.83	4.30

LOSSES: 0.0 HP | 0.0 N*M*MM
 TOTAL ENGINE: 18.8 HP | 18.64 N*M*MM




SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T150 | MAX POWER: 18.8 (18.8) / 7605 | MAX TORQUE: 18.66 (18.66) / 6628 | Temp. °C: 35.1 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 107.0 | Date/Time: 5/8/2018 3:49:58 PM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T150

Comments: PERTAMAX TURBO/REXTOR MAP E

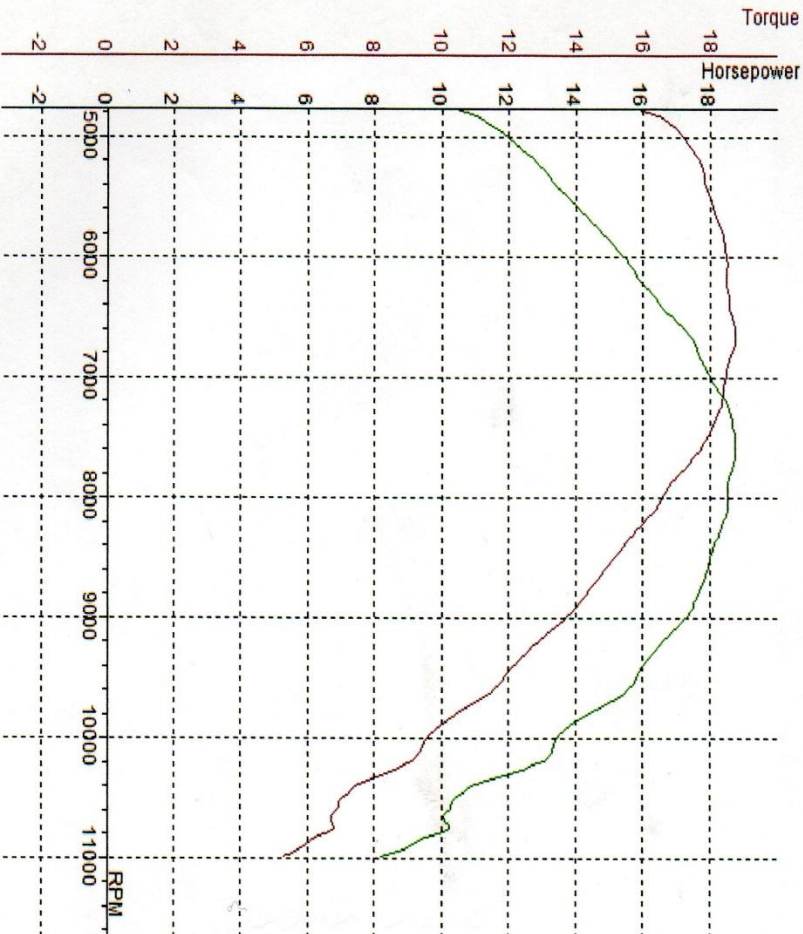

RPM	HP (HP)	(N*m*M)	T
4250	10.9	16.22	0.52
4500	11.2	16.50	0.54
4750	11.4	16.73	0.56
5000	12.0	17.16	0.62
5250	13.0	17.70	0.74
5500	13.9	17.95	0.86
5750	14.8	18.28	0.98
6000	15.5	18.41	1.08
6250	16.2	18.44	1.20
6500	16.9	18.55	1.30
6750	17.3	18.66	1.36
7000	17.6	18.59	1.42
7250	18.1	18.34	1.54
7500	18.6	18.19	1.66
7750	18.8	17.76	1.78
8000	18.7	17.58	1.82
8250	18.7	17.15	1.90
8500	18.5	16.44	2.04
8750	18.3	15.74	2.18
9000	18.0	15.02	2.32
9250	17.7	14.31	2.48
9500	17.2	13.56	2.64
9750	16.4	12.52	2.82
10000	15.8	11.73	3.00
10250	14.6	10.60	3.20
10500	13.4	9.45	3.44
10750	12.2	8.43	3.70
11000	10.3	6.94	4.00


LOSSES: 0.0 HP
 TOTAL ENGINE: 18.8 HP



SPORT DYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T149 | MAX POWER: 18.7 (18.7) / 7879 | MAX TORQUE: 18.03 (18.03) / 6700 | Temp. °C: 35.1 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.8 | Date/Time: 5/8/2018 3:49:41 PM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T149

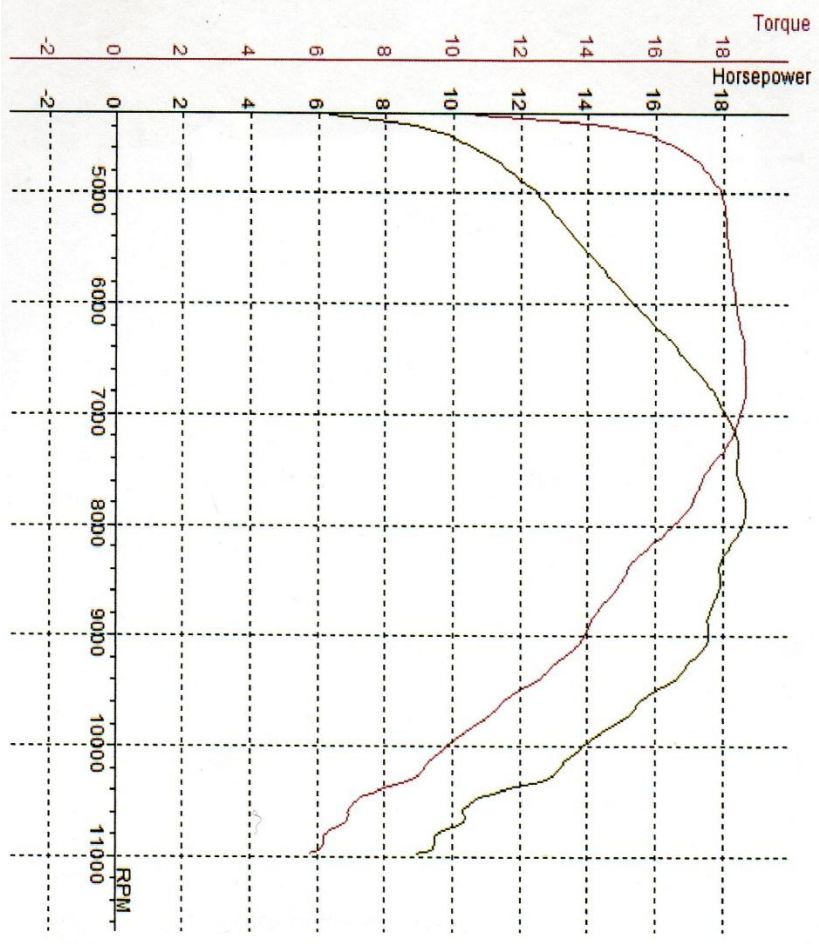

Comments
 PERTAINMAX TURBO/EXTOR MAP E

RPM	HP (HP)	(N*M*M)	T
4000	7.3	12.17	0.52
4250	8.2	13.44	0.54
4500	10.2	16.17	0.62
4750	11.6	17.40	0.74
5000	12.6	17.93	0.86
5250	13.3	18.04	0.98
5500	14.0	18.12	1.08
5750	14.7	18.21	1.20
6000	15.5	18.34	1.32
6250	16.2	18.49	1.42
6500	17.0	18.57	1.54
6750	17.5	18.63	1.62
7000	17.7	18.62	1.66
7250	18.2	18.40	1.78
7500	18.5	18.04	1.90
7750	18.4	17.42	2.02
8000	18.7	17.09	2.14
8250	18.7	16.87	2.20
8500	18.5	16.41	2.28
8750	18.0	15.49	2.42
9000	17.9	14.94	2.56
9250	17.6	14.24	2.72
9500	16.9	13.86	2.86
9750	15.9	12.96	3.04
10000	15.0	11.85	3.22
10250	13.9	10.92	3.42
10500	13.0	9.81	3.64
10750	10.6	7.10	3.88
	9.7	6.39	4.20
			4.54

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.7HP
 0.0N*M*MM
 18.63N*M*MM




TEST NAME: UMY DYNO TEST SECORPHYO T148 | MAX POWER: 18.5 (18.5) / 7547 | MAX TORQUE: 18.66 (18.66) / 6536 | Temp. °C: 35.1 | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:49:24 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

DATA FOR TEST: UMY DYNO TEST SECORPHYO T148

Comments: PERTAMAX TURBO/REXTOR MAP E

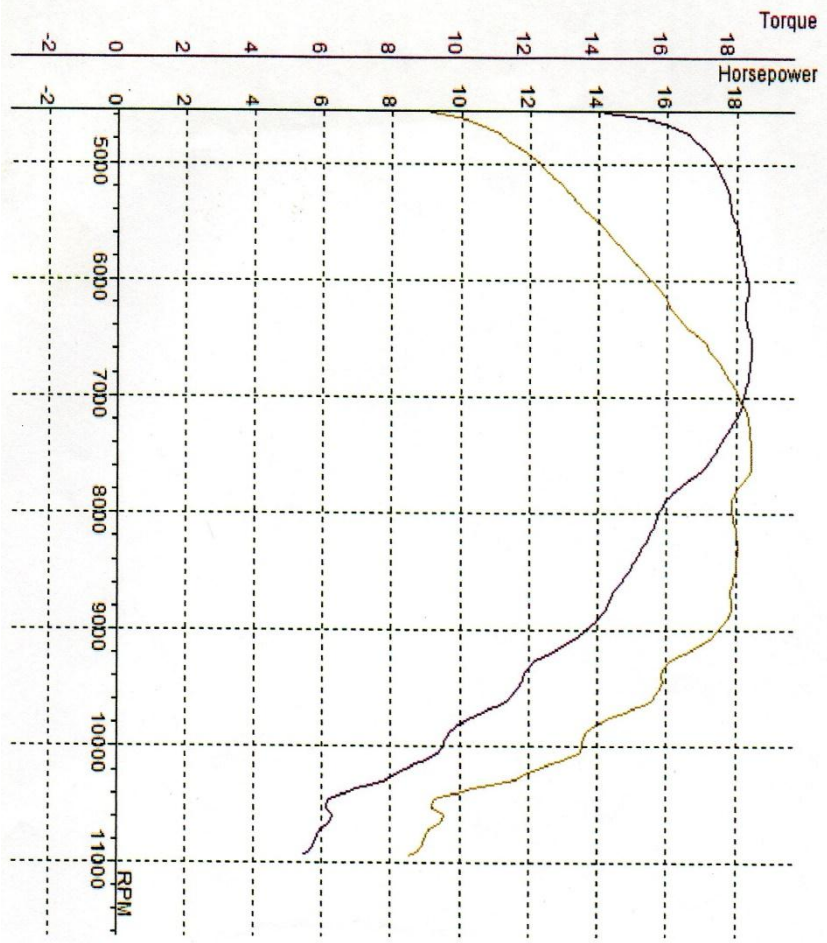


RPM	HP (HP)	(N*M*MD)	T
4250	9.7	15.10	0.52
4500	10.2	15.71	0.54
4750	11.1	16.79	0.60
5000	12.3	17.61	0.72
5250	13.2	17.97	0.84
5500	14.1	18.21	0.96
5750	14.8	18.35	1.06
6000	15.6	18.53	1.18
6250	16.2	18.45	1.30
6500	17.1	18.66	1.42
6536	17.1	18.66	1.42
6750	17.6	18.59	1.52
7000	18.1	18.40	1.64
7250	18.4	18.03	1.76
7500	18.5	17.50	1.88
7547	18.5	17.42	1.90
7750	18.1	16.60	2.02
8000	17.9	15.88	2.16
8250	18.0	15.49	2.30
8500	18.0	15.00	2.44
8750	17.4	14.45	2.60
9000	17.4	13.69	2.76
9250	16.1	12.27	2.94
9500	15.8	11.74	3.12
9750	14.2	10.29	3.34
10000	13.6	9.58	3.56
10250	11.8	8.16	3.82
10500	9.2	6.16	4.20
10750	9.0	5.90	4.54

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.5 HP



TEST NAME: UMY DYNO TEST SECORPIYO T138
 MAX POWER: 18.8 (18.8) / 7466
 MAX TORQUE: 18.82 (18.82) / 6475
 Temp. °C: 35.6
 Humidity %: 40 %
 Pressure: 1000.0 mbar
 KMH: 106.8
 Date/Time: 5/8/2018 3:21:14 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

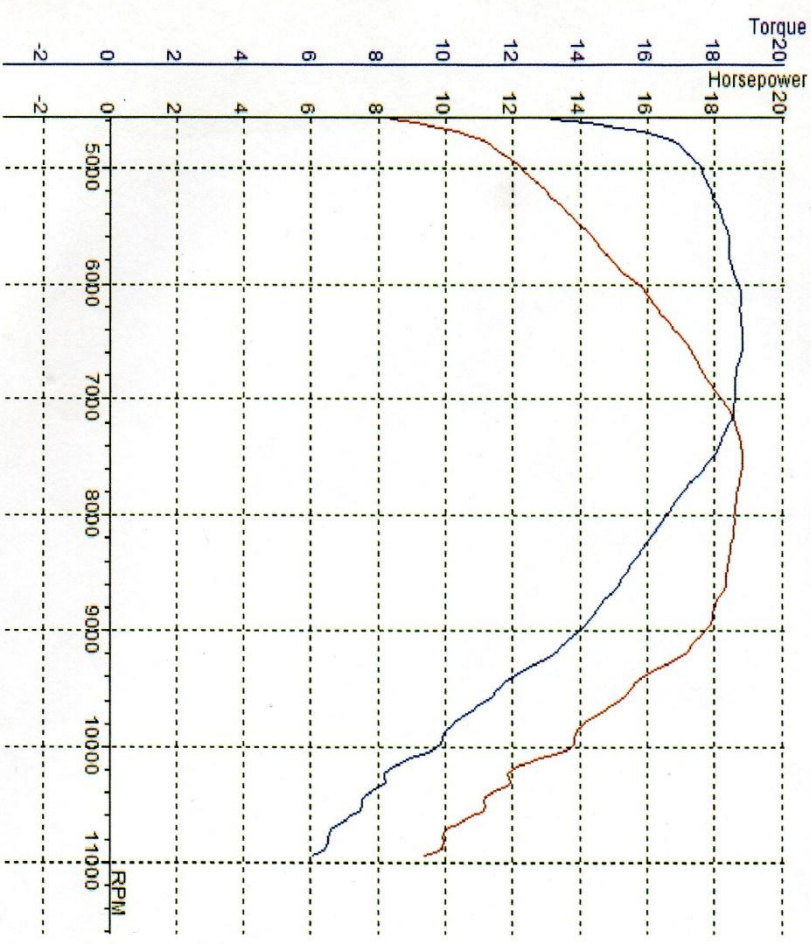

DATA FOR TEST: UMY DYNO TEST SECORPIYO T138

Comments: PERTAMAX TURBO/REXTOR MAP 1

RPM	HP (HP)	(N*m)	T
4250	9.1	14.21	0.52
4500	9.8	15.10	0.54
4750	11.1	16.69	0.60
5000	12.3	17.60	0.72
5250	13.1	17.94	0.82
5500	14.1	18.30	0.94
5750	14.9	18.42	1.06
6000	15.8	18.72	1.18
6250	16.4	18.74	1.28
6475	17.1	18.82	1.38
6500	17.2	18.81	1.40
6750	17.7	18.60	1.52
7000	18.3	18.56	1.64
7250	18.7	18.33	1.74
7466	18.8	17.99	1.84
7500	18.8	17.79	1.88
7750	18.7	17.11	2.00
8000	18.6	16.45	2.14
8250	18.5	15.82	2.28
8500	18.3	15.27	2.42
8750	18.0	14.60	2.56
9000	17.7	13.92	2.72
9250	16.8	12.81	2.90
9500	15.4	11.46	3.10
9750	14.3	10.34	3.30
10000	13.7	9.71	3.52
10250	11.8	8.17	3.78
10500	11.2	7.51	4.08
10750	9.9	6.53	4.40


LOSSES: 0.0 HP
 TOTAL ENGINE: 18.8 HP



SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53

Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T137 | MAX POWER: 18.9 (18.9) / 7529 | MAX TORQUE: 18.97 (18.97) / 6689 | Temp. °C: 35.6 | Humidity %: 40% | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:20:59 PM

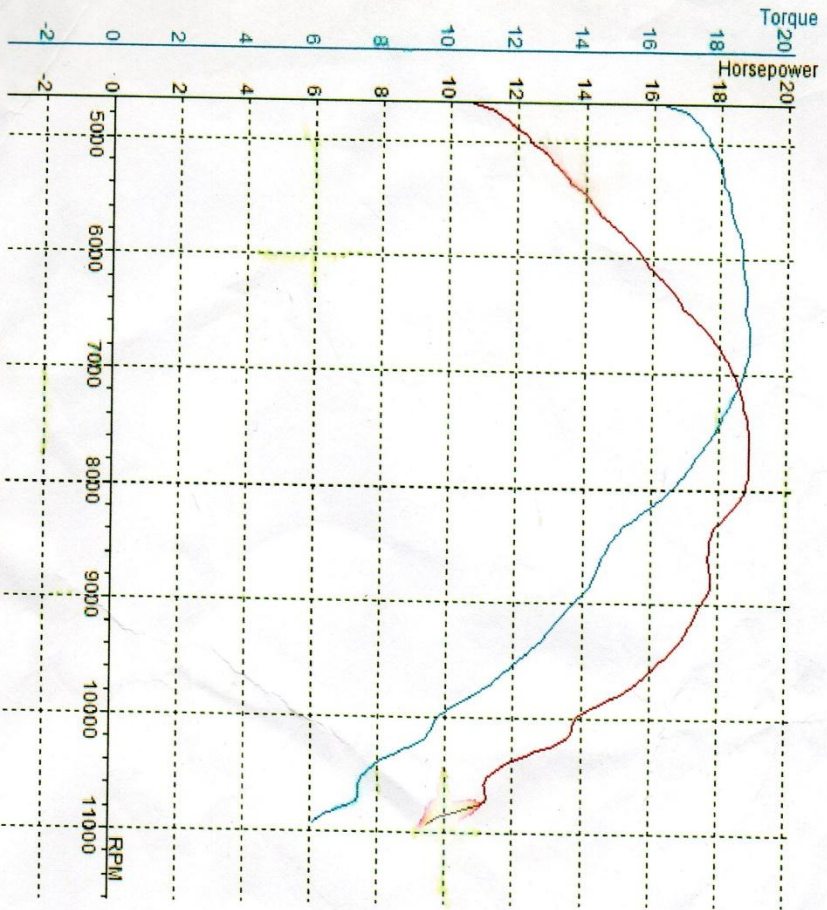

DATA FOR TEST: UMY DYNO TEST SECORPIYO T137

Comments
 PERFORMAX TURBO/EXTOR MAP 1

RPM	HP (HP)	(N*M*ND)	T
4250	11.0	16.82	0.52
4500	11.3	17.10	0.54
4750	11.5	17.29	0.56
5000	12.4	17.77	0.66
5250	13.3	18.12	0.78
5500	14.2	18.39	0.90
5750	15.1	18.65	1.02
6000	15.8	18.74	1.12
6250	16.6	18.88	1.24
6500	17.2	18.87	1.34
6689	17.8	18.97	1.42
6750	18.0	18.96	1.46
7000	18.5	18.73	1.58
7250	18.7	18.32	1.70
7500	18.9	17.88	1.82
7529	18.9	17.88	1.82
7750	18.9	17.30	1.94
8000	18.8	16.62	2.08
8250	18.1	15.52	2.22
8500	17.7	14.79	2.36
8750	17.8	14.39	2.52
9000	17.4	13.71	2.68
9250	17.0	13.02	2.84
9500	16.3	12.15	3.02
9750	15.3	11.09	3.22
10000	13.8	9.78	3.44
10250	13.1	9.03	3.68
10500	11.3	7.59	3.98
10750	11.0	7.21	4.30

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.9 HP




SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T139
 MAX POWER: 18.8 (18.8) / 7385
 MAX TORQUE: 18.80 (18.80) / 6530
 Temp. °C: 35.6
 Humidity %: 40
 Pressure: 1000.0 mbar
 KMH: 106.9
 Date/Time: 5/8/2018 3:21:28 PM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T139

Comments:
 PERIMAX TURBO/REXTOR MAP 1

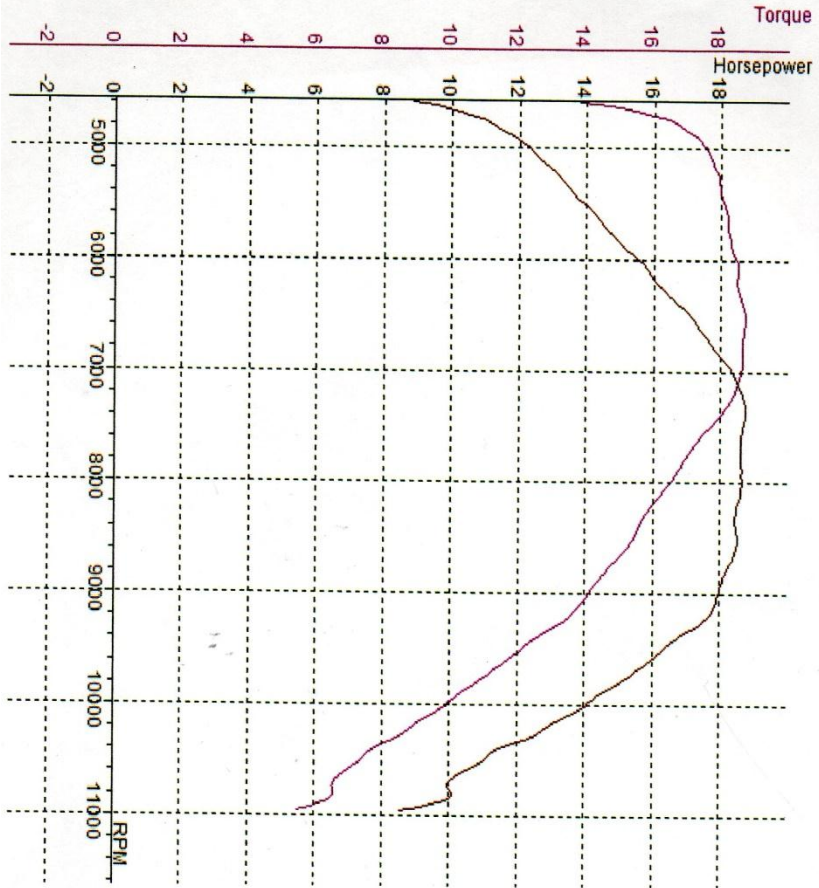


RPM	HP (HP@N*M*M)	T
4250	9.5	14.77
4500	10.1	15.49
4750	11.2	16.78
5000	12.5	17.70
5250	13.2	17.97
5500	14.0	18.18
5750	14.8	18.29
6000	15.6	18.51
6250	16.3	18.55
6500	17.2	18.80
6530	17.2	18.80
6750	17.7	18.70
7000	18.3	18.65
7250	18.7	18.35
7385	18.8	18.09
7500	18.7	17.71
7750	18.6	17.02
8000	18.6	16.55
8250	18.5	15.89
8500	18.5	15.46
8750	18.2	14.73
9000	17.9	14.14
9250	17.4	13.31
9500	16.3	12.12
9750	15.2	11.03
10000	14.0	9.91
10250	12.6	8.67
10500	11.0	7.43
10750	10.0	6.57

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.8HP
 0.0N*M*M
 18.80N*M*M



TEST NAME: UNY DYNO TEST SECORPIYO T141 | MAX POWER: 18.8 (18.8) / 7442 | MAX TORQUE: 18.72 (18.72) / 6548 | Temp. °C: 35.6 | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:21:59 PM

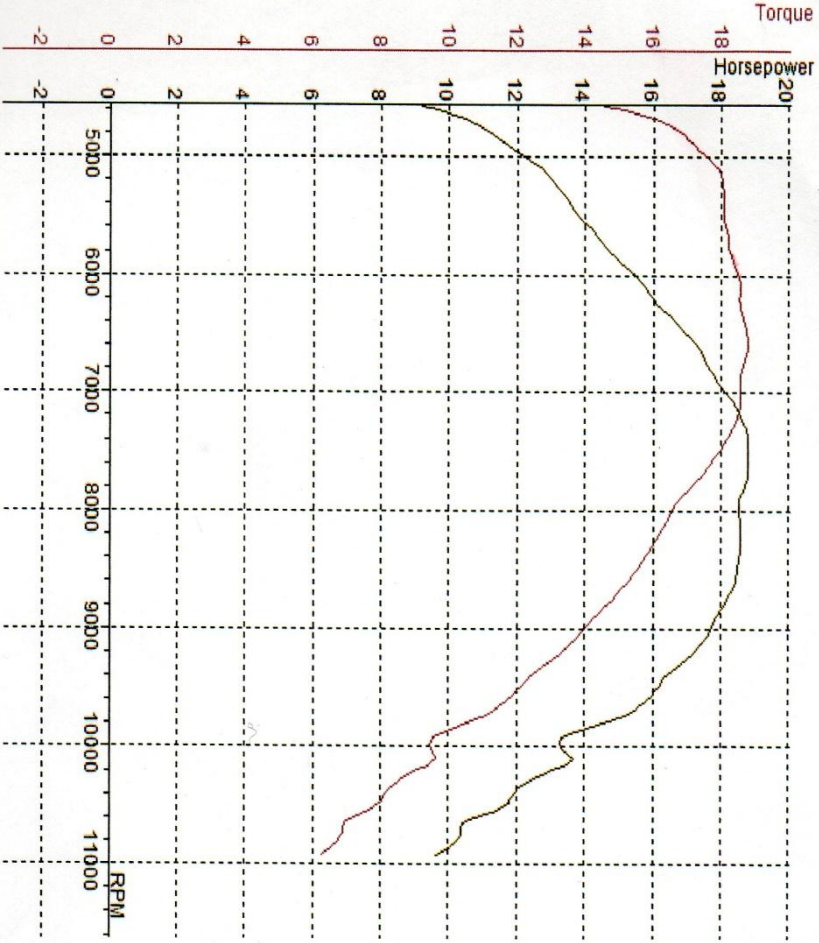

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

DATA FOR TEST: UNY DYNO TEST SECORPIYO T141

Comments: PERFORMAX TURBO/REXTOR MAP 1


RPM	HP (HP)	T (N*m)
4250	9.7	15.10
4500	10.1	15.59
4750	11.0	16.59
5000	12.4	17.61
5250	13.3	17.99
5500	13.8	17.98
5750	14.6	18.14
6000	15.5	18.43
6250	16.3	18.49
6500	17.2	18.72
6750	17.6	18.56
7000	18.2	18.50
7250	18.7	18.29
7442	18.8	18.00
7500	18.8	17.79
7750	18.7	17.08
8000	18.5	16.43
8250	18.6	15.95
8500	18.5	15.40
8750	18.2	14.74
9000	17.7	13.94
9250	17.0	12.98
9500	16.1	11.99
9750	15.1	10.93
10000	13.4	9.45
10250	12.6	8.69
10500	11.6	7.77
10750	10.4	6.81

LOSSES: 0.0N*M*M
 TOTAL ENGINE: 18.8HP 18.72N*M*M



TEST NAME: UMY DYNO TEST SECORPIYO T140 | MAX POWER: 18.6 (18.6) / 7503 | MAX TORQUE: 18.81 (18.81) / 6666 | Temp. °C: 35.6 | Humidity %: 40 | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:21:44 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

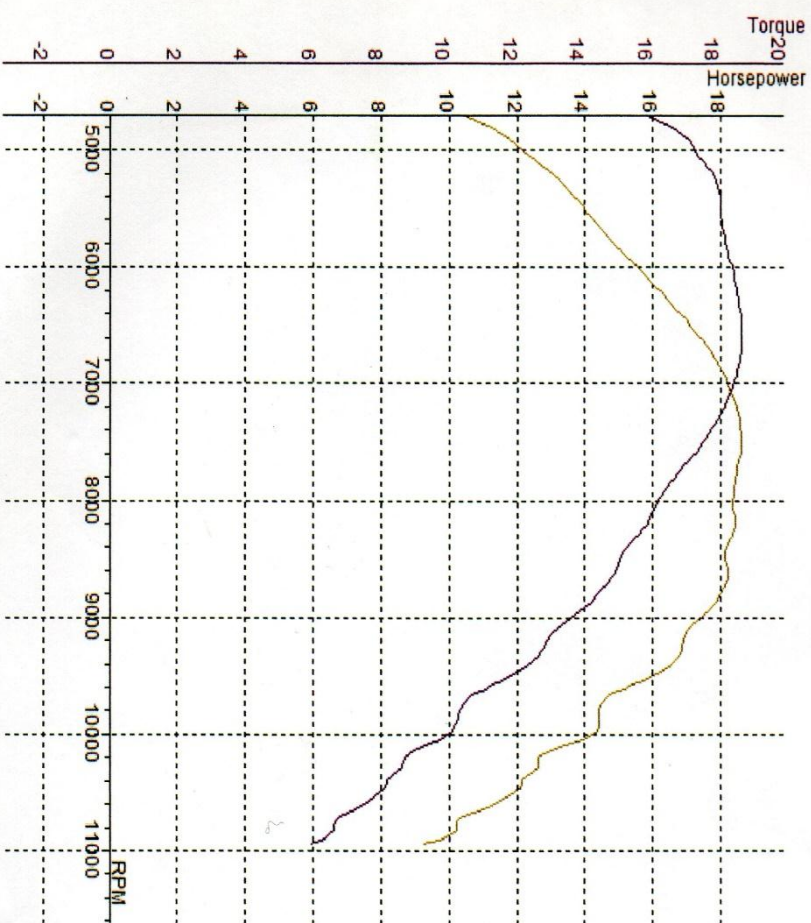

DATA FOR TEST: UMY DYNO TEST SECORPIYO T140

Comments: PERTAMAX TURBO/REXTOR MAP 1


RPM	HP (HP)	N*M (N*M)	T
4250	10.9	16.40	0.52
4500	11.2	16.68	0.34
4750	11.4	16.91	0.56
5000	12.2	17.43	0.64
5250	13.3	18.05	0.76
5500	14.0	18.19	0.88
5750	14.8	18.33	1.00
6000	15.6	18.52	1.10
6250	16.4	18.70	1.22
6500	17.2	18.80	1.34
6666	17.6	18.81	1.40
6750	17.8	18.76	1.44
7000	18.2	18.53	1.56
7250	18.5	18.17	1.68
7500	18.6	17.67	1.80
7503	18.6	17.67	1.80
7750	18.5	16.89	1.94
8000	18.4	16.24	2.08
8250	18.4	15.74	2.22
8500	18.2	15.13	2.36
8750	18.1	14.63	2.50
9000	17.4	13.71	2.66
9250	16.8	12.88	2.84
9500	15.9	11.87	3.02
9750	14.4	10.49	3.22
10000	14.1	9.99	3.46
10250	12.6	8.71	3.70
10500	11.8	7.96	3.98
10750	10.2	6.70	4.30

LOSSES: 0.0 HP | 0.0 N*M
 TOTAL ENGINE: 18.6 HP | 18.81 N*M



TEST NAME: UMY DYNO TEST SECORPIYO T136 | MAX POWER: 18.9 (18.9) / 7374 | MAX TORQUE: 18.73 (18.73) / 6564 | Temp. °C: 35.5 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 107.1 | Date/Time: 5/8/2018 3:17:38 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

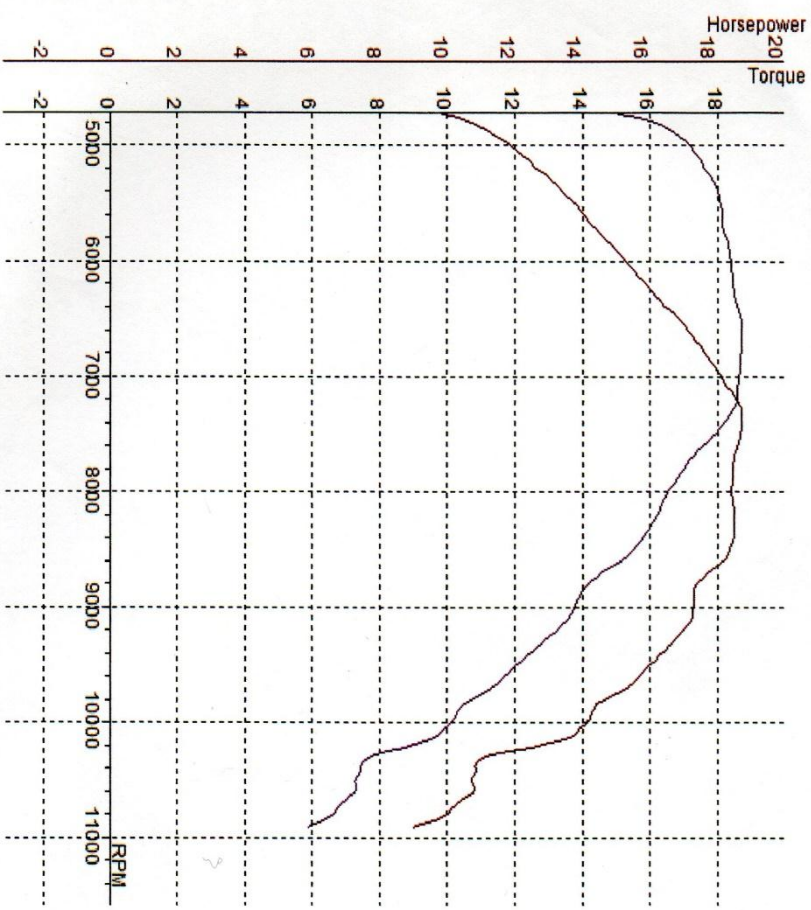

DATA FOR TEST: UMY DYNO TEST SECORPIYO T136

Comments: PERFORMAXTURBO/REXTOR MAP 5

RPM	HP (HP)(N*M*MD)	T
4250	10.4	15.70
4500	10.8	16.16
4750	11.1	16.50
5000	12.0	17.21
5250	13.1	17.79
5500	14.0	18.11
5750	14.7	18.25
6000	15.6	18.41
6250	16.2	18.48
6500	17.1	18.72
6750	17.2	18.73
7000	17.8	18.69
7250	18.4	18.61
7500	18.8	18.52
7750	18.9	18.28
8000	18.7	17.82
8250	18.6	17.10
8500	18.6	16.49
8750	18.7	16.12
9000	18.5	15.44
9250	17.6	14.25
9500	17.5	13.72
9750	17.0	13.00
10000	16.1	12.01
10250	15.0	10.85
10500	14.2	10.02
10750	11.7	8.06
	10.8	7.29
	10.3	6.73

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.9 HP




SPORTDYNNO V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included!

TEST NAME UMY DYNNO TEST SECORPIYO T135 | **MAX POWER** 19.0 (19.0) / 7775 | **MAX TORQUE** 18.74 (18.74) / 6908 | **Temp. °C** 35.5 °C | **Humidity %** 40 % | **Pressure** 1000.0 mbar | **KMH** 106.9 | **Date/Time** 5/8/2018 3:17:22 PM

DATA FOR TEST: UMY DYNNO TEST SECORPIYO T135

Comments
PERTAMAX TURBO/EXTOR MAP 5

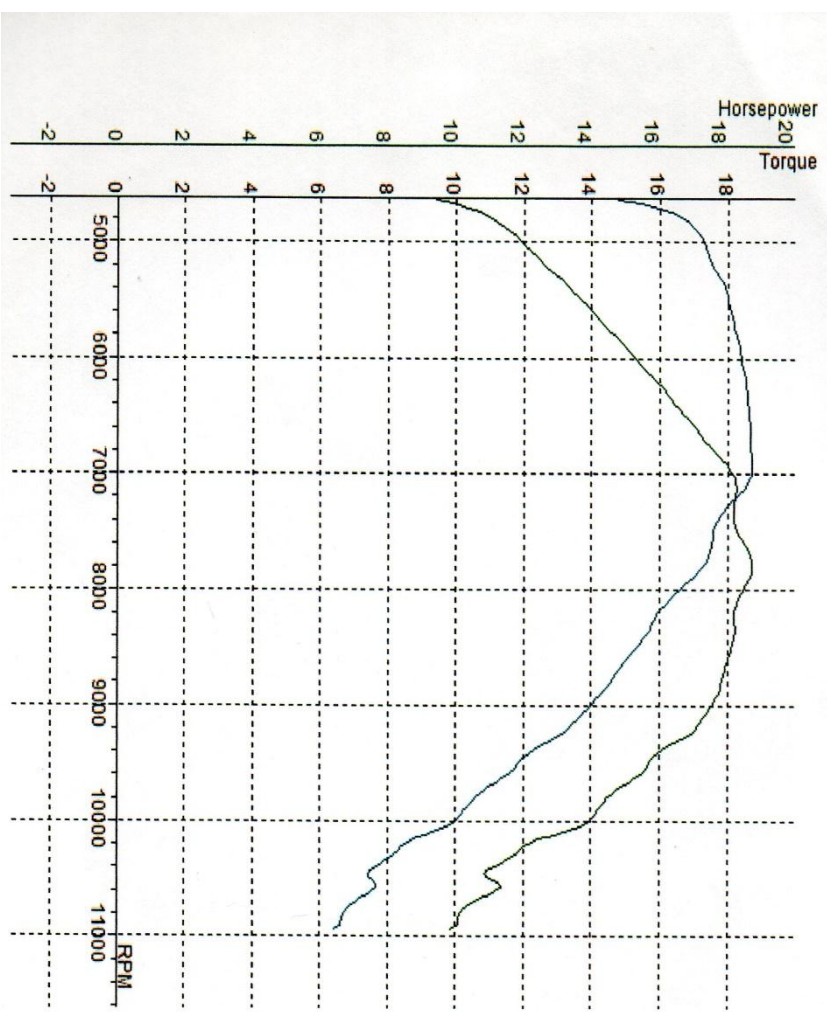


RPM	HP (HP)	(N*M*M)	T
4250	10.0	15.42	0.52
4500	10.5	15.95	0.54
4750	11.1	16.65	0.58
5000	12.2	17.36	0.70
5250	13.1	17.76	0.82
5500	13.9	18.04	0.92
5750	14.7	18.25	1.04
6000	15.6	18.42	1.16
6250	16.3	18.57	1.26
6500	17.0	18.65	1.38
6750	17.8	18.69	1.50
7000	18.2	18.74	1.56
7250	18.4	18.68	1.62
7500	18.4	17.99	1.74
7750	19.0	17.36	1.98
8000	19.0	17.36	1.98
8250	18.6	16.48	2.12
8500	18.4	15.86	2.24
8750	18.3	15.24	2.40
9000	18.1	14.63	2.54
9250	17.7	13.93	2.70
9500	17.0	12.98	2.88
9750	15.8	11.79	3.06
10000	14.8	10.73	3.26
10250	14.0	9.92	3.48
10500	12.0	8.30	3.74
10750	11.2	7.51	4.02
11000	10.4	6.82	4.34

LOSSES: 0.0 HP
TOTAL ENGINE: 19.0 HP | 18.74 N*M*M



SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T134 | MAX POWER: 187 (18.7) / 7643 | MAX TORQUE: 18.69 (18.69) / 6504 | Temp. °C: 35.5 | Humidity %: 40 | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/8/2018 3:17:06 PM

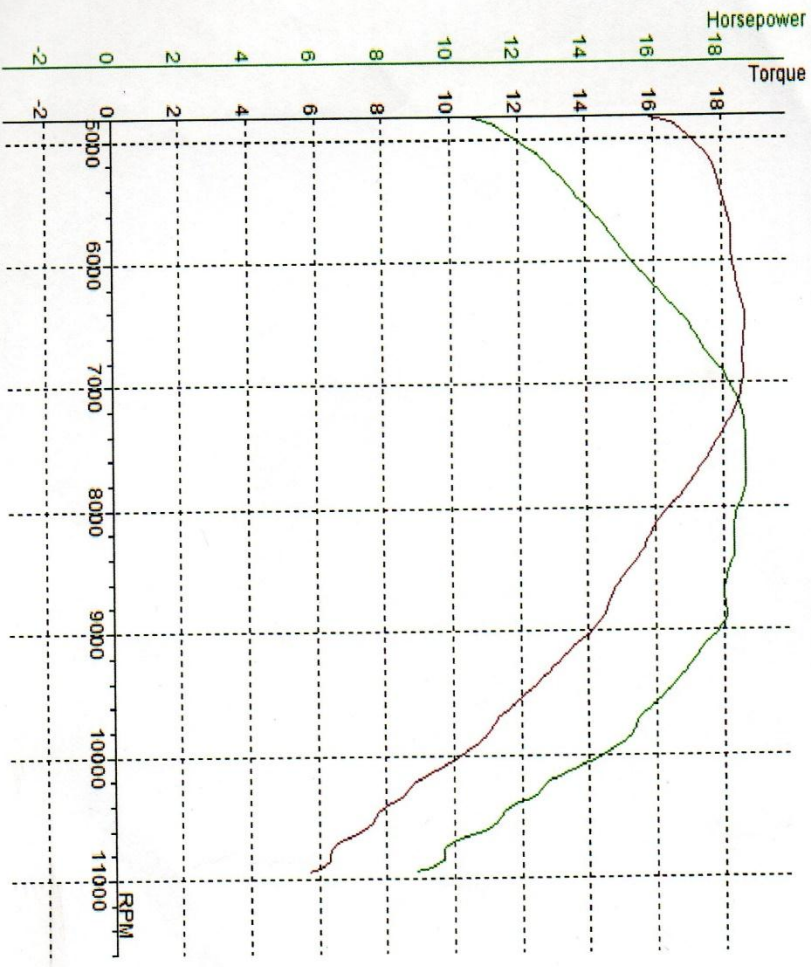

DATA FOR TEST: UMY DYNO TEST SECORPIYO T134

Comments: PERTAMAX TURBO/REXTOR MAP 5


RPM	HP (HP) (N*M*MM)	T
4500	11.1	16.35
4750	11.4	16.66
5000	12.1	17.21
5250	13.2	17.85
5500	13.9	18.06
5750	14.7	18.28
6000	15.5	18.35
6250	16.3	18.54
6500	17.0	18.69
6750	17.6	18.59
7000	18.3	18.57
7250	18.7	18.25
7500	18.7	17.70
7643	18.7	17.43
7750	18.7	17.15
8000	18.5	16.37
8250	18.4	15.77
8500	18.2	15.16
8750	18.1	14.65
9000	17.9	14.07
9250	17.1	13.04
9500	16.3	12.12
9750	15.4	11.15
10000	14.3	10.12
10250	12.6	8.71
10500	11.4	7.65
10750	9.7	6.38

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.7HP
 0.0N*M*MM
 18.69N*M*MM



TEST NAME: UMY DYNO TEST SECORPIYO T133 | MAX POWER: 18.5 (18.5) 7236 | MAX TORQUE: 18.79 (18.79) 6461 | Temp. °C: 35.3 | Humidity %: 40 | Pressure: 1000.0 mbar | KMH: 106.8 | Date/Time: 5/8/2018 3:16:48 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

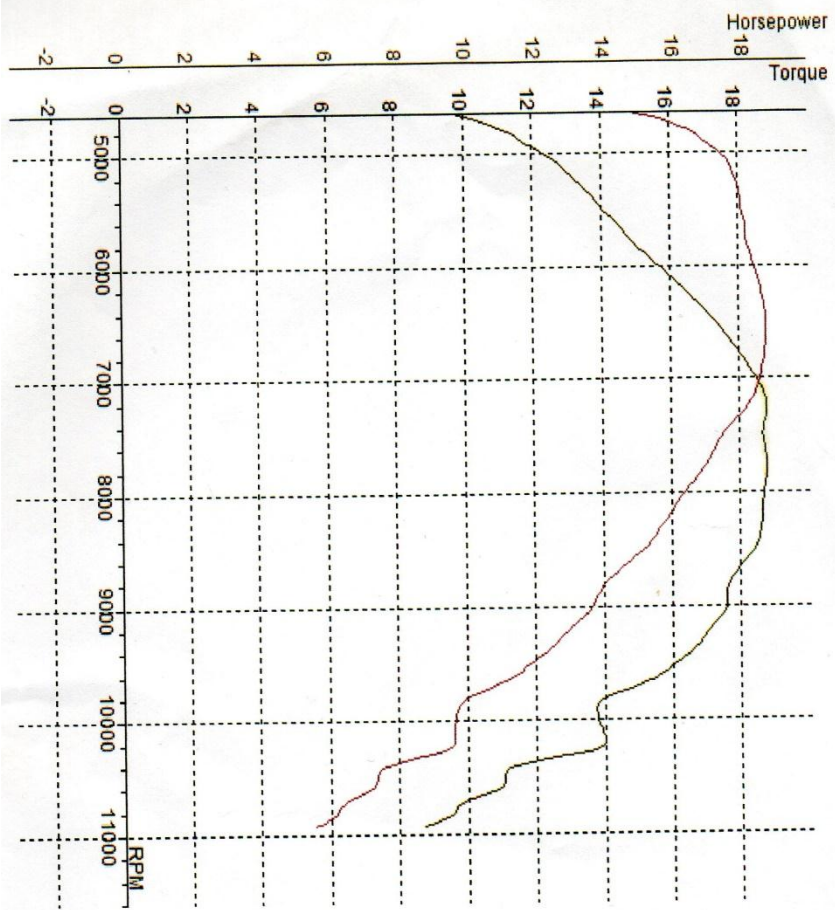

DATA FOR TEST: UMY DYNO TEST SECORPIYO T133

Comments: PERTAMAX TURBO/REXTOR MAP 5


RPM	HP (HP)	(N*M/M)	T
4250	10.2	15.55	0.52
4500	10.5	15.98	0.54
4750	10.9	16.33	0.56
5000	12.3	17.56	0.68
5250	13.3	17.97	0.80
5500	13.9	18.08	0.90
5750	14.7	18.22	1.02
6000	15.6	18.47	1.14
6250	16.5	18.69	1.26
6461	17.0	18.79	1.34
6500	17.1	18.79	1.36
6750	17.8	18.74	1.48
7000	18.3	18.56	1.60
7236	18.5	18.25	1.70
7250	18.5	18.14	1.72
7500	18.4	17.45	1.84
7750	18.5	17.01	1.96
8000	18.4	16.35	2.10
8250	18.4	15.79	2.24
8500	18.1	15.05	2.40
8750	17.5	14.17	2.54
9000	17.3	13.65	2.70
9250	16.7	12.75	2.88
9500	15.9	11.82	3.06
9750	14.1	10.21	3.28
10000	13.6	9.63	3.50
10250	13.7	9.45	3.72
10500	10.9	7.35	4.04
10750	9.6	6.32	4.38

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.5 HP



TEST NAME: UMY DYNO TEST SECORPHYO TT132 | MAX POWER: 18.6 (18.6) / 7297 | MAX TORQUE: 18.78 (18.78) / 6346 | Temp. °C: 35.5 | Humidity %: 40 | Pressure: 1000.0 mbar | KMH: 107.0 | Date/Time: 5/8/2018 3:16:27 PM

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

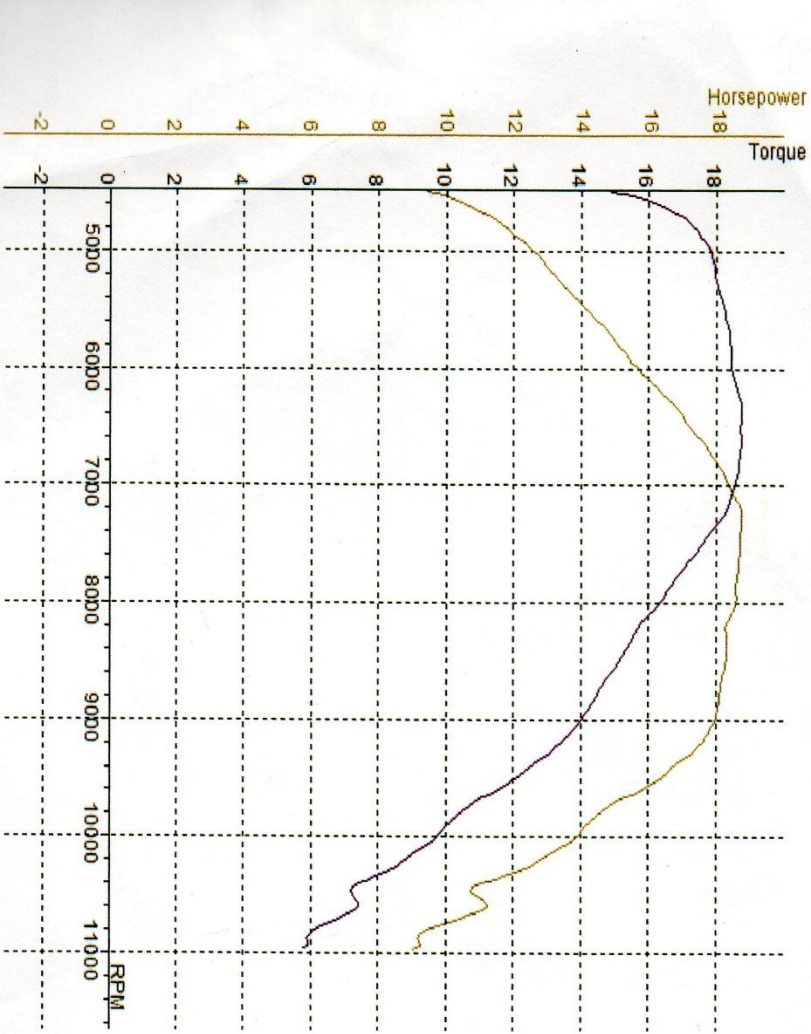

DATA FOR TEST: UMY DYNO TEST SECORPHYO TT132

Comments
 PERTAMAX TURBO/REXTOR MAP 5

RPM	HP (HP)	(N*M*D)	T
4250	9.8	15.57	0.52
4500	10.2	16.05	0.54
4750	11.5	17.30	0.64
5000	12.4	17.84	0.74
5250	13.2	18.03	0.86
5500	14.1	18.27	0.98
5750	14.9	18.43	1.10
6000	15.7	18.51	1.22
6250	16.4	18.73	1.32
6346	16.7	18.78	1.36
6500	17.1	18.74	1.44
6750	17.7	18.71	1.54
7000	18.2	18.54	1.66
7250	18.6	18.25	1.78
7500	18.5	17.58	1.80
7297	18.6	18.15	1.90
7750	18.4	16.89	2.04
8000	18.4	16.29	2.18
8250	18.1	15.55	2.32
8500	18.1	15.10	2.46
8750	17.9	14.49	2.62
9000	17.7	13.92	2.78
9250	17.2	13.11	2.94
9500	16.1	11.99	3.12
9750	14.5	10.50	3.34
10000	13.7	9.69	3.56
10250	12.4	8.54	3.80
10500	10.8	7.29	4.12
10750	9.8	6.46	4.46

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.6 HP




SPORTDYNO V3.3
 DYNAMOMETER, SD325
 ROLLER INERTIA: 1.35
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T077 | MAX POWER: 18.2 (18.2) / 7455 | MAX TORQUE: 18.20 (18.20) / 6514 | Temp. °C: 34.4 °C | Humidity %: 38 % | Pressure: 1000.0 mbar | KMH: 106.8 | Date/Time: 5/8/2018 11:55:33 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T077

Comments
 SELL92/CDI STD

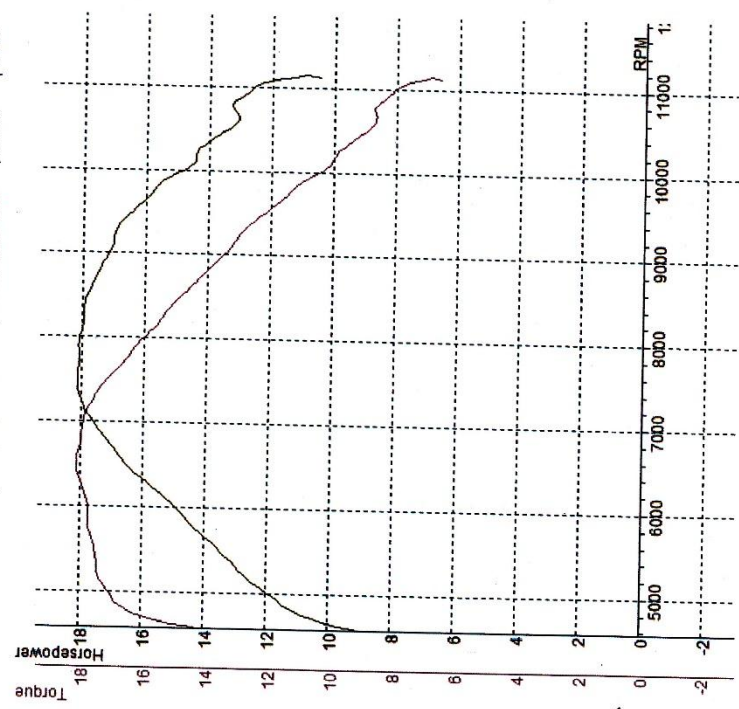

LOSSES: 0.0 N*m/M | 0.0 HP
 TOTAL ENGINE: 18.2 HP | 18.20 N*m/M




Sport Devices
www.SportDevices.com

SPORTDYN0 V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME | MAX TORQUE | MAX POWER | Temp. °C | Humidity % | Pressure | KMH | Date/Time
 UMY DYNO TEST SECORPIYO T078 | 18.09 (18.09) / 6851 | 18.5 (18.5) / 7814 | 34.4 °C | 38 % | 1000.0 mbar | 106.8 | 5/8/2018 11:55:52 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T078

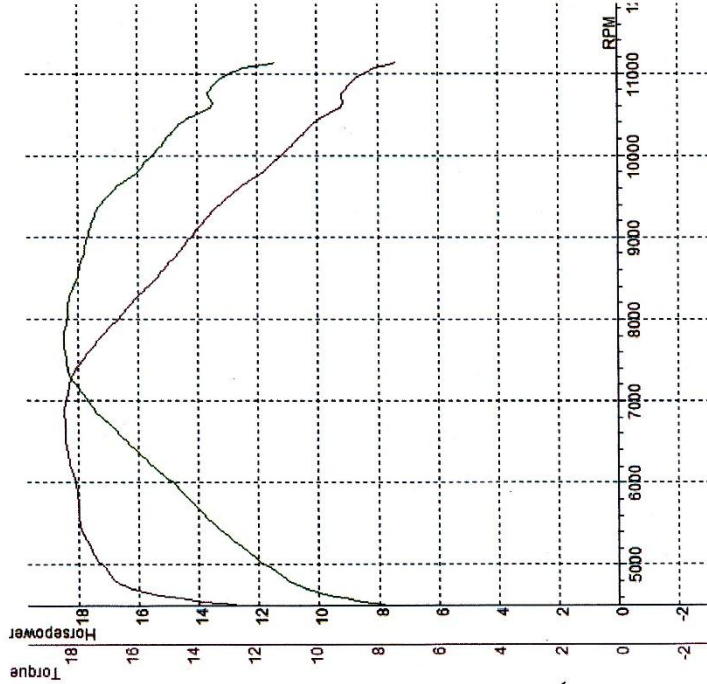

Comments
SELL:92/CDI STD

RPM	HP (HP)(N*M*M)	T
4250	8.6	13.54
4500	9.2	14.35
4750	10.7	16.15
5000	11.8	16.87
5250	12.7	17.29
5500	13.6	17.58
5750	14.3	17.83
6000	14.9	17.90
6250	15.7	17.92
6500	16.4	18.02
6750	17.1	18.06
7000	17.4	18.09
7250	17.7	17.99
7500	18.2	17.84
7750	18.4	17.38
8000	18.5	16.90
8250	18.5	16.83
8500	18.3	16.29
8750	18.3	15.70
9000	18.0	15.00
9250	17.8	14.44
9500	17.7	13.89
9750	17.4	13.30
10000	16.9	12.62
10250	16.1	11.68
10500	15.5	10.99
10750	14.9	10.32
11000	14.0	9.39
	13.7	8.99
	12.9	8.26
	12.9	4.32

LOSSES: 0.0N*M*M
TOTAL ENGINE: 18.5HP
18.09N*M*M




SportDevices
www.SportDevices.com

SPORTDYN0 V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T079 | MAX POWER: 18.6 (18.6) / 7984 | MAX TORQUE: 18.17 (18.17) / 6595 | Temp. °C: 34.4 °C | Humidity %: 38 % | Pressure: 1000.0 mbar | KMH: 106.3 | Date/Time: 5/8/2018 11:56:11 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T079

RPM	HP (HFWO (N*M*M))	T
4250	10.4	15.78
4500	10.7	16.05
4750	10.9	16.25
5000	11.8	16.81
5250	12.6	17.17
5500	13.5	17.41
5750	14.3	17.66
6000	15.0	17.78
6250	15.8	17.99
6500	16.5	18.11
6595	16.8	18.17
6750	17.2	18.09
7000	17.8	18.05
7250	18.2	17.85
7500	18.4	17.42
7750	18.5	16.92
7984	18.6	16.34
8000	18.6	16.46
8250	18.4	15.79
8500	18.0	15.02
8750	17.8	14.43
9000	17.8	13.99
9250	17.6	13.47
9500	17.1	12.72
9750	16.3	11.85
10000	15.7	11.07
10250	15.1	10.38
10500	13.7	9.22
10750	13.4	8.79
11000	12.9	8.27

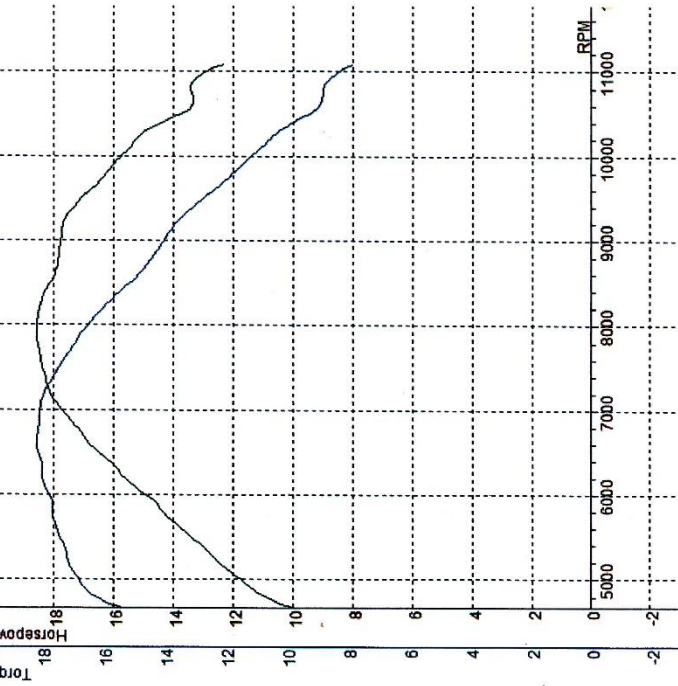

LOSSES: 0.0 HP
TOTAL ENGINE: 18.6 HP


0.0N*M*M
18.17N*M*M



SPORTDYN V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYN TEST SECORPYO T080 | MAX POWER: 18.6 (18.6) / 7587 | MAX TORQUE: 18.22 (18.22) / 6735 | Pressure: 1000.0 mbar | KMH: 106.7 | Date/Time: 5/8/2018 11:56:29 AM
 Humidity: 38 % | Temp: 34.4 °C

DATA FOR TEST: UMY DYN TEST SECORPYO T080

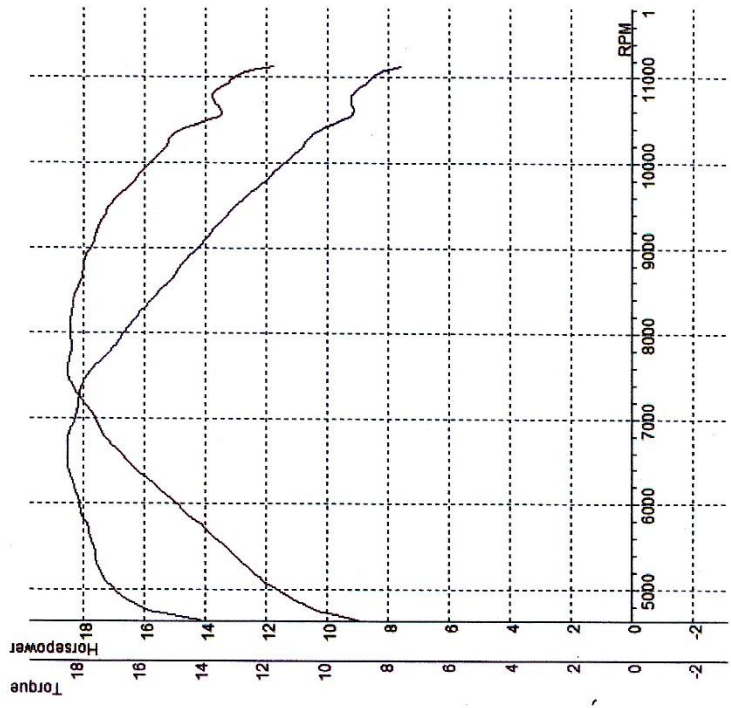

Comments
 SELL 92 CDI STD


RPM	HP (HP)	(N*M)	T
4250	9.5	14.62	0.52
4500	10.0	15.18	0.54
4750	10.3	15.59	0.56
5000	11.7	16.77	0.68
5250	12.7	17.22	0.80
5500	13.5	17.40	0.92
5750	14.2	17.58	1.02
6000	15.0	17.83	1.14
6250	15.9	18.08	1.26
6500	16.6	18.20	1.36
6735	17.2	18.22	1.46
6750	17.3	18.21	1.48
7000	17.6	17.96	1.58
7250	18.2	17.84	1.70
7500	18.3	17.58	1.82
7587	18.6	17.40	1.86
7750	18.5	16.95	1.94
8000	18.5	16.37	2.08
8250	18.4	15.86	2.20
8500	18.2	15.25	2.34
8750	18.0	14.61	2.48
9000	17.8	13.98	2.64
9250	17.5	13.39	2.80
9500	17.1	12.77	2.96
9750	16.4	11.91	3.14
10000	15.8	11.20	3.32
10250	15.2	10.51	3.52
10500	13.9	9.37	3.74
10750	13.8	9.06	3.96
11000	13.1	8.39	4.22

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.6HP
 0.0N*M*MM
 18.22N*M*MM



SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPHYO T080 | MAX POWER: 18.6 (18.6) / 7587 | MAX TORQUE: 18.22 (18.22) / 6735 | Temp. °C: 34.4 °C | Humidity %: 38% | Pressure: 1000.0 mbar | KMH: 106.7 | Date/Time: 5/8/2018 11:56:29 AM

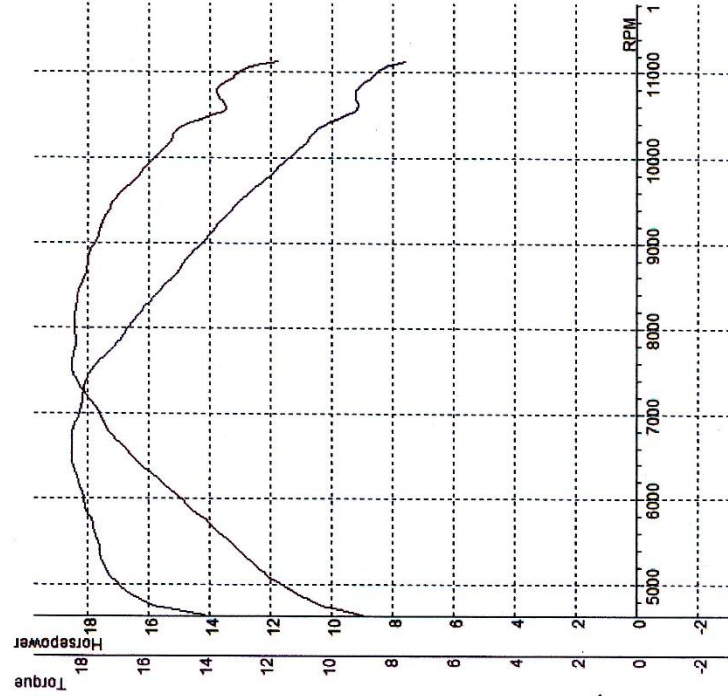

DATA FOR TEST: UMY DYNO TEST SECORPHYO T080

Comments
 SELL 92/CDI STD

RPM	HP (HP)	(N·M·M)	T
4250	9.5	14.62	0.52
4500	10.0	15.18	0.54
4750	10.3	15.59	0.56
5000	11.7	16.77	0.68
5250	12.7	17.22	0.80
5500	13.5	17.40	0.92
5750	14.2	17.58	1.02
6000	15.0	17.83	1.14
6250	15.9	18.08	1.26
6500	16.6	18.20	1.36
6735	17.2	18.22	1.46
6750	17.3	18.21	1.48
7000	17.6	17.96	1.58
7250	18.2	17.84	1.70
7500	18.5	17.58	1.82
7587	18.6	17.40	1.86
7750	18.3	16.95	1.94
8000	18.4	16.37	2.08
8250	18.2	15.86	2.20
8500	18.2	15.25	2.34
8750	18.0	14.61	2.48
9000	17.8	13.98	2.64
9250	17.5	13.39	2.80
9500	17.1	12.77	2.96
9750	16.4	11.91	3.14
10000	15.8	11.20	3.32
10250	15.2	10.51	3.52
10500	13.9	9.37	3.74
10750	13.8	9.06	3.96
11000	13.1	8.39	4.22

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.6 HP
 0.0 N·M·M
 18.22 N·M·M




SportDevices
www.SportDevices.com

SPORTDYN V3J
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME: UMY DYN TEST SECORPIYO T002 | MAX TORQUE: 19.03 (19.03) / 6572 | MAX POWER: 18.7 (18.7) / 7348 | Temp. °C: 33.1 °C | Humidity %: 46 % | Pressure: 1000.0 mbar | KMH: 107.1 | Date/Time: 5/3/2018 11:11:28 AM

DATA FOR TEST: UMY DYN TEST SECORPIYO T002

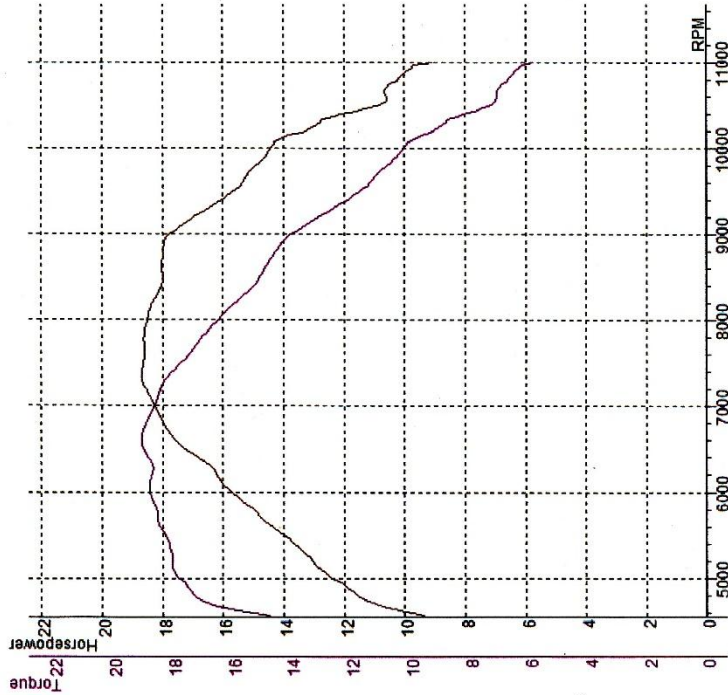

Comments
SELL 92: REXTOR MAP 1

RPM	HP (HP)	(N*M*MM)	T
4250	9.9	15.43	0.32
4500	10.3	16.02	0.34
4750	11.3	17.06	0.60
5000	12.5	17.79	0.72
5250	13.3	17.99	0.84
5500	14.0	18.21	0.94
5750	14.9	18.48	1.06
6000	15.8	18.76	1.18
6250	16.3	18.63	1.28
6500	17.4	19.00	1.40
6572	17.5	19.03	1.42
6750	18.0	18.86	1.52
7000	18.3	18.57	1.62
7250	18.7	18.30	1.74
7348	18.7	18.13	1.78
7500	18.6	17.67	1.86
7750	18.6	17.03	2.00
8000	18.5	16.43	2.12
8250	18.2	15.70	2.26
8500	18.0	15.02	2.40
8750	18.0	14.55	2.56
9000	17.7	13.89	2.72
9250	16.7	12.80	2.88
9500	15.6	11.60	3.08
9750	15.0	10.86	3.28
10000	14.4	10.18	3.48
10250	13.0	8.94	3.72
10500	10.8	7.26	4.02
10750	10.4	6.84	4.34
11000	9.1	5.81	4.80

LOSSES: 0.0 HP
TOTAL ENGINE: 18.7HP
0.0N*MM
19.03N*MM



SportDevices
www.SportDevices.com

SFORIDYNO V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.


TEST NAME: UMY DYNO TEST SECORPIYO T003 | MAX POWER: 18.97 (18.97) / 7478 | Temp. °C: 33.1 °C | Humidity %: 46 % | Pressure: 1000.0 mbar | KMH: 106.9 | Date/Time: 5/3/2018 11:11:44 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T003

Comments: SELL 92/ REXTOR MAP 1

RPM	HP (HP) (N*M*M)	T
4000	9.4	15.35
4250	9.9	15.88
4500	10.5	16.59
4750	11.6	17.50
5000	12.6	17.98
5250	13.4	18.21
5500	14.1	18.35
5750	14.9	18.47
6000	15.7	18.65
6250	16.5	18.85
6478	17.2	18.97
6500	17.3	18.95
6750	17.9	18.93
7000	18.3	18.78
7250	18.8	18.43
7478	18.9	17.99
7500	18.9	17.87
7750	18.7	17.06
8000	18.2	16.15
8250	18.1	15.99
8500	18.2	15.16
8750	18.1	14.60
9000	17.3	13.63
9250	17.1	13.11
9500	16.5	12.29
9750	15.4	11.18
10000	15.1	10.70
10250	13.3	9.13
10500	11.2	7.55
10750	11.0	7.23

LOSSES: 0.0 HP
TOTAL ENGINE: 18.97HP
0.0N*M*M
18.97N*M*M

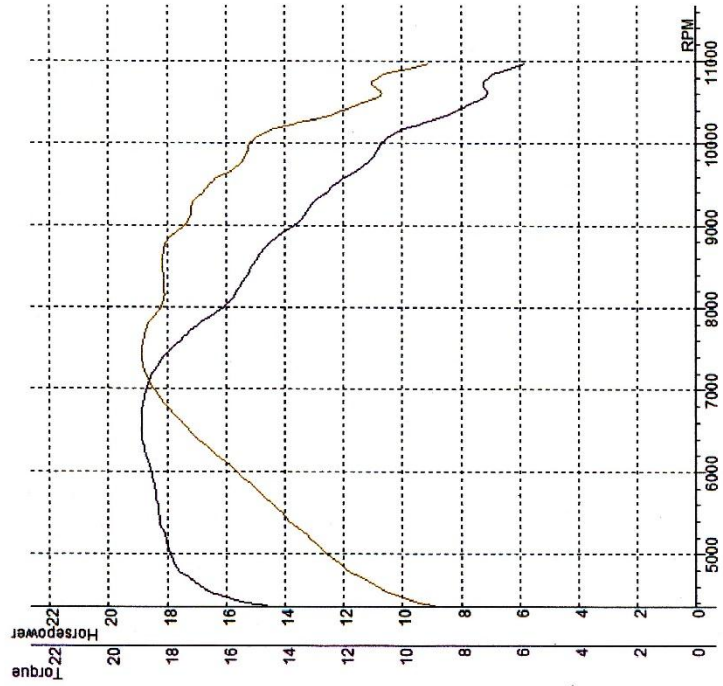




SportDevices
www.SportDevices.com

SPORTDYN0 V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53
Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T004 MAX POWER: 18.8 (18.8) / 7618 MAX TORQUE: 19.19 (19.19) / 6599 Temp. °C: 33.1 °C Humidity %: 46 % Pressure: 1000.0 mbar KMH: 107.1 Date/Time: 5/3/2018 11:12:01 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T004

Comments
SELL 92/ REXTOR MAP 1

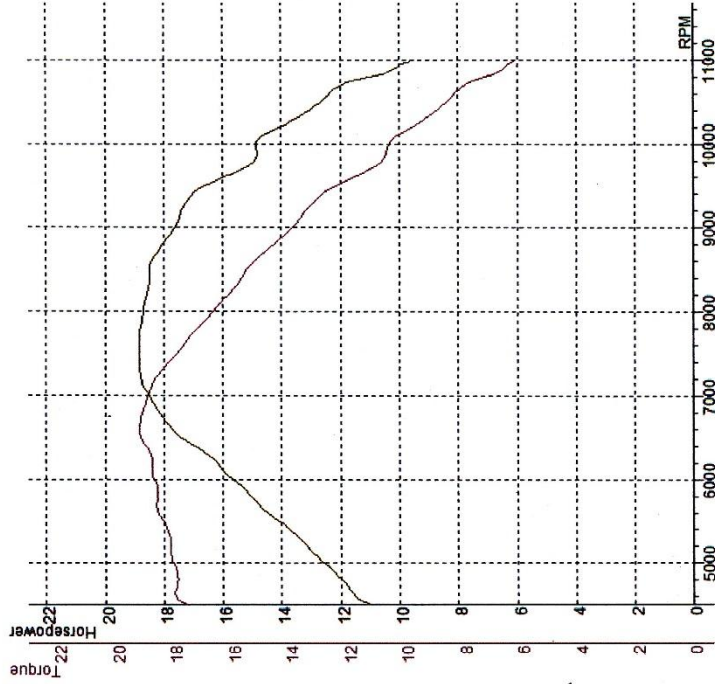

RPM	HP (HP)	(N*M/M)	T
4000	11.3	17.82	0.52
4250	11.5	17.92	0.54
4500	11.6	17.93	0.56
4750	11.9	17.84	0.62
5000	12.7	18.03	0.74
5250	13.3	18.08	0.84
5500	14.2	18.35	0.96
5750	15.0	18.55	1.08
6000	15.7	18.66	1.18
6250	16.5	18.75	1.30
6500	17.4	19.14	1.40
6599	18.1	19.19	1.44
6750	18.1	19.07	1.52
7000	18.6	18.92	1.64
7250	18.8	18.39	1.76
7500	18.8	17.78	1.88
7618	18.8	17.61	1.92
7750	18.8	17.22	2.00
8000	18.7	16.62	2.12
8250	18.5	15.94	2.26
8500	18.5	15.43	2.40
8750	18.1	14.61	2.56
9000	17.5	13.78	2.72
9250	17.3	13.22	2.88
9500	16.5	12.28	3.06
9750	15.0	10.85	3.26
10000	14.9	10.49	3.46
10250	13.7	9.47	3.68
10500	12.6	8.49	3.94
10750	11.5	7.59	4.22

LOSSES: 0.0 HP
TOTAL ENGINE: 18.8 HP
0.0 N*M/M
19.19 N*M/M




SportDevices
www.sportdevices.com

SPORTDYNO V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53

Displacement Correction
Correction Factor: ISO1585
NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T005 | MAX POWER: 18.9 (18.9) / 7732 | Temp. °C: 33.1 °C | Humidity %: 46 % | Pressure: 1000.0 mbar | 107.1 | Date/Time: 5/3/2018 11:12:16 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T005

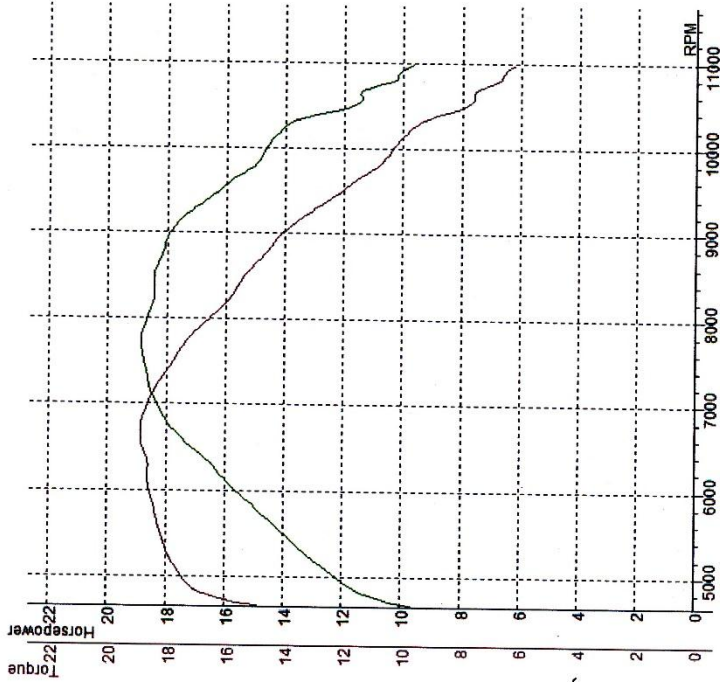

Comments
SELL 92/ REXTOR MAP 1


RPM	HP (HP)	(N*M/M)	T
4250	10.7	15.63	0.52
4500	10.7	16.19	0.54
4750	11.1	16.61	0.56
5000	12.4	17.35	0.68
5250	13.2	17.97	0.78
5500	14.1	18.25	0.90
5750	14.9	18.44	1.02
6000	15.7	18.64	1.12
6250	16.4	18.67	1.24
6500	17.2	18.87	1.34
6725	17.8	18.93	1.44
6750	17.9	18.92	1.46
7000	18.4	18.63	1.58
7250	18.6	18.23	1.70
7500	18.8	17.77	1.82
7732	18.9	17.39	1.92
7750	18.9	17.30	1.94
8000	18.6	16.50	2.08
8250	18.4	15.85	2.20
8500	18.4	15.40	2.34
8750	18.1	14.66	2.50
9000	17.8	14.01	2.66
9250	17.2	13.12	2.82
9500	16.2	12.04	3.00
9750	15.1	10.98	3.20
10000	14.6	10.34	3.40
10250	14.0	9.68	3.62
10500	11.6	7.84	3.90
10750	10.5	6.90	4.22
11000	9.2	5.89	4.64

LOSSES: 0.0 HP
TOTAL ENGINE: 18.9 HP
0.0 N*M/M
18.93 N*M/M



SPORTDYN V13
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNOTEST SECORPYO T006 | MAX POWER: 19.0 (19.0)/7558 | MAX TORQUE: 18.90 (18.90)/6390 | Pressure: 1000.0 mbar | Humidity: 46% | Temp: 33.1 °C | Date/Time: 5/3/2018 11:12:33 AM

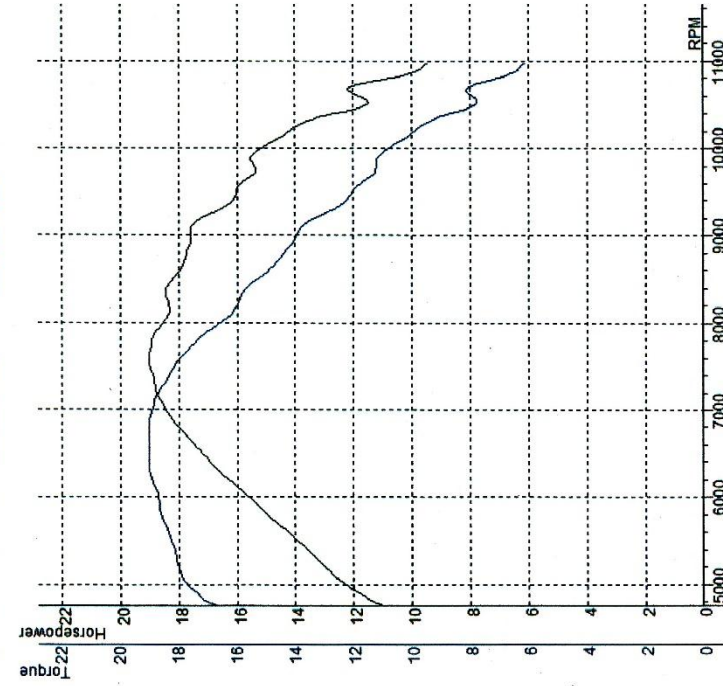

DATA FOR TEST: UMY DYNOTEST SECORPYO T006

Comments
 SELL92 REXTOR MAP 1

RPM	HP (HP)	(N*M*MM)	T
4250	11.3	16.93	0.52
4500	11.6	17.12	0.54
4750	11.8	17.27	0.56
5000	12.3	17.63	0.62
5250	13.2	17.96	0.74
5500	14.1	18.18	0.86
5750	14.9	18.45	0.96
6000	15.7	18.59	1.08
6250	16.5	18.83	1.18
6390	16.9	18.90	1.24
6500	17.3	18.87	1.30
6750	17.9	18.89	1.40
7000	18.5	18.76	1.52
7250	18.8	18.43	1.64
7500	19.0	18.00	1.76
7558	19.0	17.92	1.78
7750	18.9	17.36	1.88
8000	18.5	16.37	2.02
8250	18.4	15.79	2.16
8500	18.1	15.13	2.30
8750	17.7	14.34	2.46
9000	17.6	13.84	2.60
9250	16.8	12.84	2.78
9500	16.0	11.93	2.96
9750	15.4	11.14	3.16
10000	15.1	10.66	3.36
10250	14.0	9.63	3.58
10500	11.5	7.72	3.86
10750	11.5	7.52	4.14

LOSSES: 0.0 HP
 TOTAL ENGINE: 19.0 HP
 0.0 N*M*MM
 18.90 N*M*MM




SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53
 Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYN0 TEST SECORPIYO T007 | MAX POWER: 19.0 (19.0) / 7748 | MAX TORQUE: 19.06 (19.06) / 6387 | Temp. °C: 33.3 °C | Humidity %: 45 % | Pressure: 1000.0 mbar | KMH: 107.2 | Date/Time: 5/3/2018 11:17:41 AM

DATA FOR TEST: UMY DYN0 TEST SECORPIYO T007

Comments
 SELL 92; REXTOR MAP 5

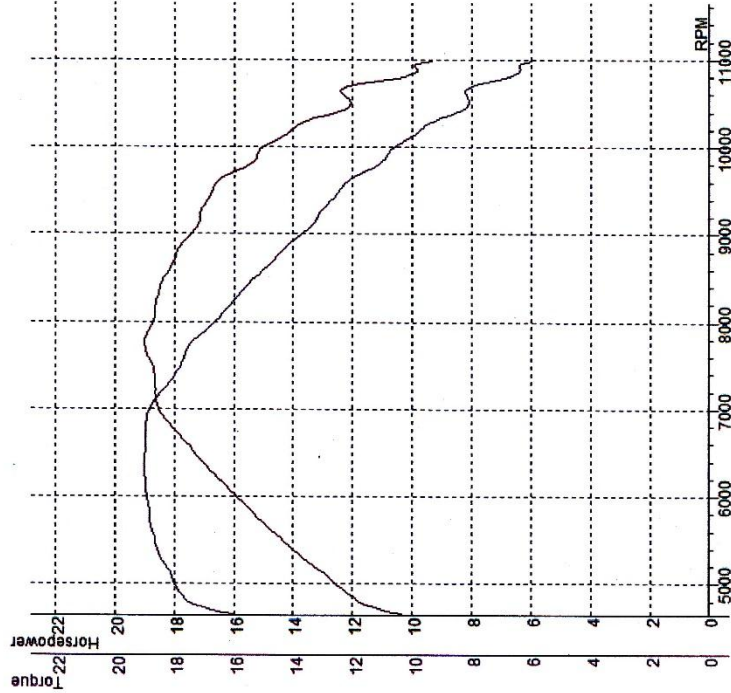

LOSSES: 0.0 HP
 TOTAL ENGINE: 19.0HP
 0.0N*M*MM
 19.06N*M*MM




SPORTDINO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53

Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

TEST NAME: UMY DYNO TEST SECORPIYO T009 | MAX POWER: 19.1 (19.1) / 7603 | MAX TORQUE: 19.02 (19.02) / 6394 | Temp. °C: 33.3 °C | Humidity %: 45 % | Pressure: 1000.0 mbar | KM/H: 106.9 | Date/Time: 5/3/2018 11:18:19 AM

DATA FOR TEST: UMY DYNO TEST SECORPIYO T009

Comments:
 SELL92 REXTOR MAP 5

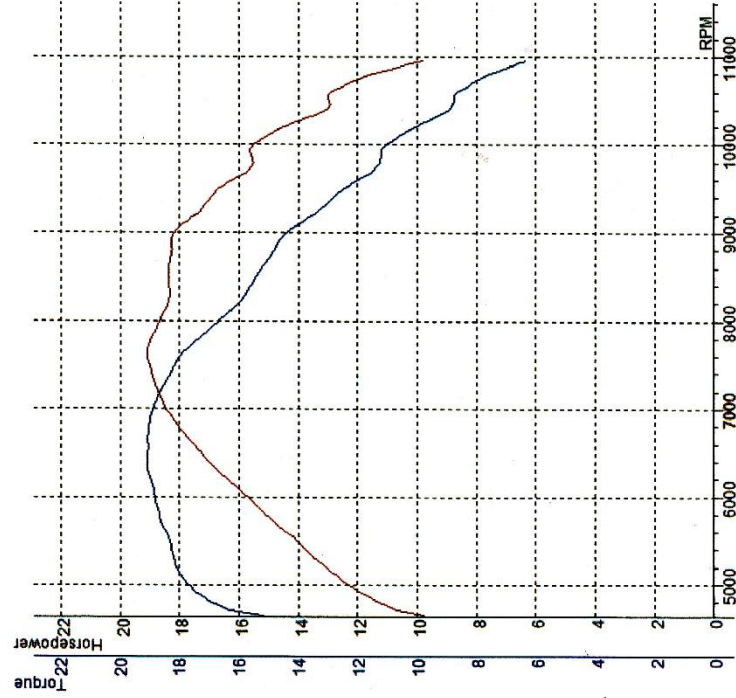

LOSSES: 0.0N*M*M
 TOTAL ENGINE: 19.1HP
 19.02N*M*M

SPORTDYNO V3.3
 DYNAMOMETER: SD325
 ROLLER INERTIA: 1.53


Displacement Correction
 Correction Factor: ISO 1585
 NOTE: Load Cell Included.

Pressure 10000.0 mbar
 Humidity % 45 %
 Temp. °C 33.3 °C
 Date/Time 5/3/2018 11:18:38 AM

TEST NAME UMY DYNOTEST SECORPIYO T010
 MAX POWER 18.8 (18.8) / 7437
 MAX TORQUE 18.99 (18.99) / 6764

DATA FOR TEST: UMY DYNOTEST SECORPIYO T010

RPM	HP (HP)	(N*M/M)	T
4250	8.9	14.18	0.52
4500	9.5	14.94	0.54
4750	11.2	16.84	0.54
5000	12.4	17.72	0.56
5250	13.3	18.10	0.86
5500	14.2	18.37	0.98
5750	15.0	18.50	1.10
6000	15.6	18.62	1.20
6250	16.4	18.66	1.32
6500	17.2	18.82	1.44
6750	18.0	18.99	1.54
7000	18.5	18.78	1.66
7250	18.7	18.35	1.78
7437	18.8	18.03	1.86
7500	18.8	17.81	1.90
7750	18.7	17.13	2.02
8000	18.6	16.48	2.16
8250	18.3	15.72	2.30
8500	18.2	15.19	2.44
8750	18.0	14.59	2.58
9000	17.8	14.01	2.74
9250	16.9	12.92	2.92
9500	16.3	12.13	3.10
9750	15.7	11.39	3.28
10000	15.2	10.72	3.48
10250	13.3	9.20	3.72
10500	12.0	8.10	4.00
10750	11.1	7.31	4.30

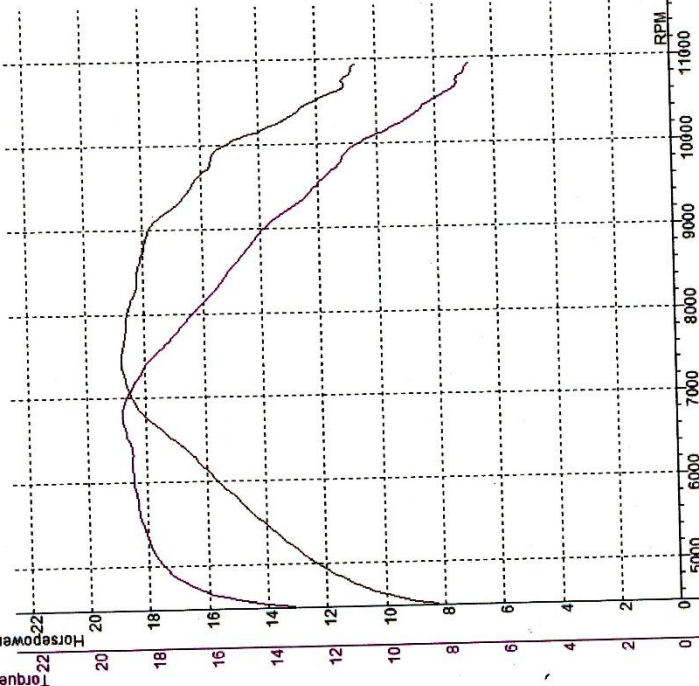

Comments
 SELL92: REXTOR MAP 5

LOSSES: 0.0 HP
 TOTAL ENGINE: 18.8 HP





SportDevices
www.sportdevices.com

SPORTDYN V3.3
DYNAMOMETER, SD325
ROLLER INERTIA: 1.33

Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.


TEST NAME: UMY DYNO TEST SECORPIYO T013 | MAX POWER: 18.1 (18.1) / 7524 | MAX TORQUE: 18.29 (18.29) / 6488 | Pressure: 1000.0 mbar | KMH: 106.6 | Date/Time: 4/26/2018 1:39:21 PM
 UMY DYNO TEST SECORPIYO T013 | 18.1 (18.1) / 7524 | 33.9 °C | Humidity: % | 46 %

DATA FOR TEST: UMY DYNO TEST SECORPIYO T013

Comments
REXTOR/MAP 5/SELL92

RPM	HP (HP/IN*MM)	T
4000	9.3	14.91
4250	9.7	15.40
4500	10.0	15.78
4750	11.2	16.83
5000	12.2	17.33
5250	12.9	17.52
5500	13.7	17.63
5750	14.3	17.81
6000	15.2	18.10
6250	16.0	18.24
6488	16.6	18.29
6500	16.7	18.28
6750	17.2	18.14
7000	17.6	18.14
7250	18.0	17.62
7500	18.1	17.18
7524	18.1	17.18
7750	18.1	16.52
8000	18.1	16.04
8250	17.5	15.05
8500	17.1	14.26
8750	16.8	13.48
9000	16.4	12.88
9250	16.1	12.32
9500	15.0	11.17
9750	14.4	10.44
10000	13.8	9.75
10250	12.6	8.70
10500	10.0	6.75
10750	9.8	6.40

LOSSES: 0.0 HP
TOTAL ENGINE: 18.1 HP
0.0N*MM
18.29N*MM

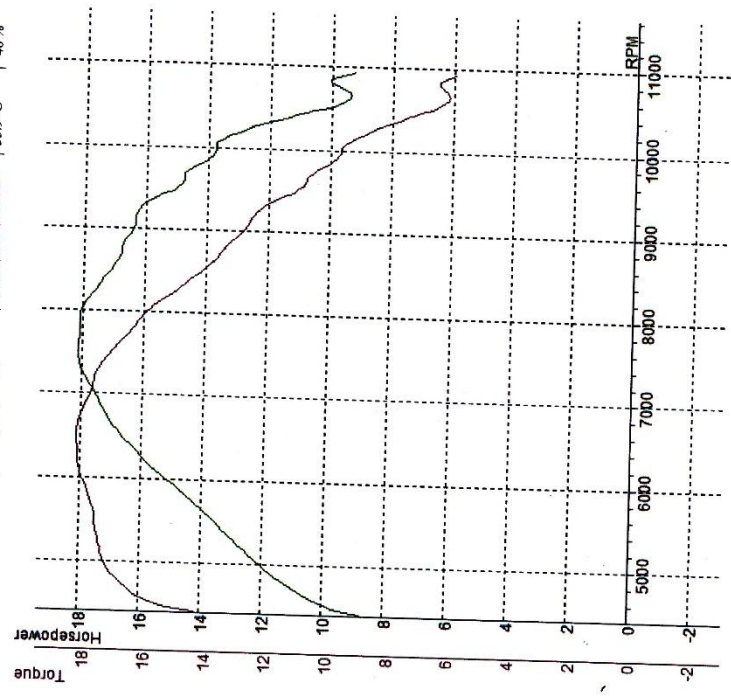




SportDevices
www.sportdevices.com

SPORTDYN V3.3
DYNAMOMETER: SD325
ROLLER INERTIA: 1.53

Displacement Correction
Correction Factor: ISO 1585
NOTE: Load Cell Included.

TEST NAME: UMY DYNOTEST SECORPIYO T048 | MAX POWER: 18.8 (18.8) / 7611 | MAX TORQUE: 18.73 (18.73) / 7035 | Temp. °C: 34.2 °C | Humidity %: 40 % | Pressure: 1000.0 mbar | KMH: 106.8 | Date/Time: 3/4/2018 4:01:55 PM

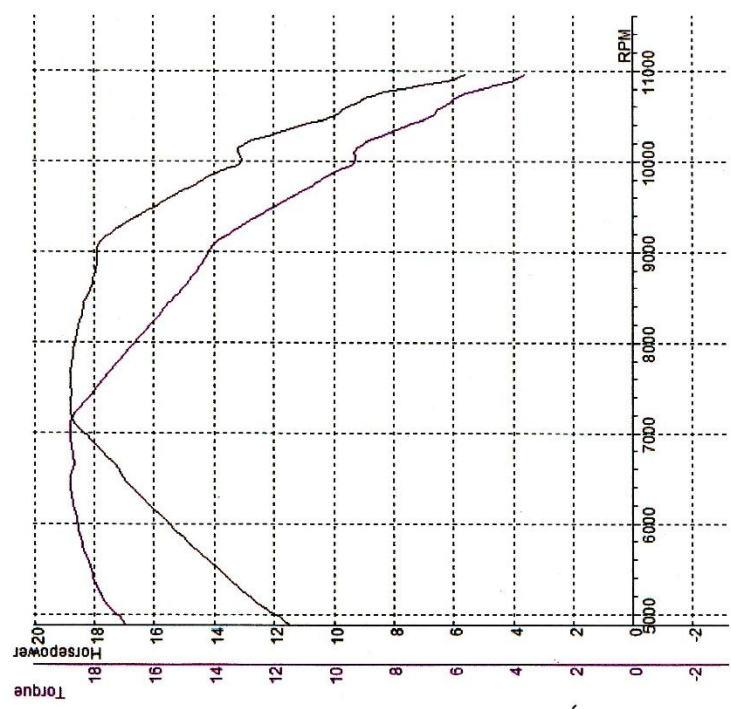

DATA FOR TEST: UMY DYNOTEST SECORPIYO T048

Comments
SELL 92/REXTOR MAP D

RPM	HP (HP)(N*M*MM)	T
4250	11.7	16.99
4500	11.9	17.09
4750	12.0	17.21
5000	12.2	17.35
5250	13.1	17.79
5500	14.0	18.05
5750	14.7	18.31
6000	15.6	18.49
6250	16.4	18.66
6500	17.0	18.70
6750	17.7	18.63
7000	18.4	18.73
7035	18.5	18.73
7250	18.8	18.38
7500	18.8	17.73
7611	18.8	17.58
7750	18.7	17.14
8000	18.6	16.46
8250	18.4	15.88
8500	18.2	15.24
8750	18.0	14.55
9000	17.9	14.06
9250	17.2	13.15
9500	15.9	11.85
9750	14.5	10.48
10000	13.0	9.22
10250	12.4	8.54
10500	9.9	6.62
10750	8.3	5.43

LOSSES: 0.0N*M*MM
TOTAL ENGINE: 18.8HP
18.73N*M*MM